




# MC60



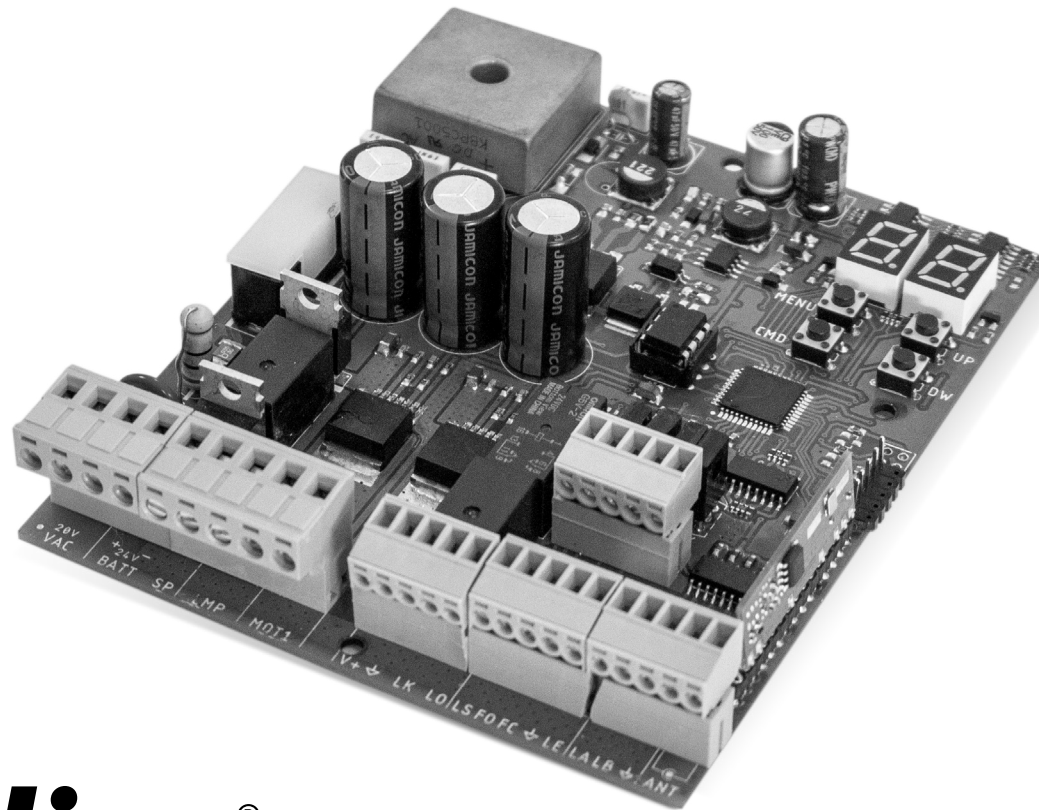


## USER'S AND INSTALLER'S MANUAL



<b>01. SAFETY INSTRUCTIONS</b>	3A
<b>02. CONTROL BOARD</b>	
CHARACTERISTICS	5B
CONNECTORS	6A
BUTTONS AND LEDs	6B
<b>03. CONNECTION SCHEME</b>	
SLIDING GATES [SC]	7
SECTIONAL DOORS [SE]	8
BARRIERS [BR]	9
AUTOMATIC BOLLARDS [PL]	10
MASTER-SLAVE	11
<b>04. INSTALLATION</b>	
ESSENTIAL STEPS FOR INSTALLATION	12A
REMOTE CONTROLS	12B
FUNCTIONS	13A
EXCLUSIVE FACTORY VALUES	13A
FUNCTIONS MENU "P"	13B
FUNCTIONS MENU "E"	14A
<b>05. PROGRAMMING "P"</b>	
P0-COURSE PROGRAMMING	14B
P1-SLOWDOWN TIME ADJUSTMENT	15A
P2-FORCE AND SENSITIVITY ADJUSTMENT	15A
P3-PEDESTRIAN COURSE TIME	15B
P4-PAUSE TIME	15B
P5-PHOTOCELLS 1 PROGRAMMING	16A
P6-PHOTOCELLS 2 PROGRAMMING	16B
P7-OPERATING LOGIC	16B
P8-FLASHING LIGHT	17A
P9-REMOTE PROGRAMMING	17A
<b>06. PROGRAMMING "E"</b>	
E0-HUMAN PRESENCE   PUSH BUTTON	17B
E1-SOFT START	18A
E2-COURTESY LIGHT TIME	18A
E3-FOLLOW ME	18B
E4-COURSE TIME ADJUSTMENT	18B

E5-BRAKE/LOCK/PUSH	19A
E6-SLOWDOWN SPEED	19A
E7-MANUEVERS COUNTER	19B
E8-RESET - RESET FACTORY VALUES	20
E9-RGB OUTPUT	20
<b>07. DISPLAY</b>	
DISPLAY INDICATIONS	21
<b>08. TROUBLESHOOTING</b>	
INSTRUCTIONS FOR FINAL CONSUMERS AND SPECIALIZED INSTALLERS	22

## ATTENTION:

	<p>This product is certified in accordance with European Community (EC) safety standards.</p>
	<p>This product complies with Directive 2011/65/EU of the European Parliament and of the Council, of 8 June 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment and with Delegated Directive (EU) 2015/863 from Commission.</p>
  	<p>(Applicable in countries with recycling systems). This marking on the product or literature indicates that the product and electronic accessories (eg. Charger, USB cable, electronic material, controls, etc.) should not be disposed of as other household waste at the end of its useful life. To avoid possible harm to the environment or human health resulting from the uncontrolled disposal of waste, separate these items from other types of waste and recycle them responsibly to promote the sustainable reuse of material resources. Home users should contact the dealer where they purchased this product or the National Environment Agency for details on where and how they can take these items for environmentally safe recycling. Business users should contact their vendor and check the terms and conditions of the purchase agreement. This product and its electronic accessories should not be mixed with other commercial waste.</p>
	<p>This marking indicates that the product and electronic accessories (eg. charger, USB cable, electronic material, controls, etc.) are susceptible to electric shock by direct or indirect contact with electricity. Be cautious when handling the product and observe all safety procedures in this manual.</p>

## GENERAL WARNINGS

- This manual contains very important safety and usage information. very important. Read all instructions carefully before beginning the installation/usage procedures and keep this manual in a safe place that it can be consulted whenever necessary.
- This product is intended for use only as described in this manual. Any other enforcement or operation that is not mentioned is expressly prohibited, as it may damage the product and put people at risk causing serious injuries.
- This manual is intended firstly for specialized technicians, and does not invalidate the user's responsibility to read the "User Norms" section in order to ensure the correct functioning of the product.
- The installation and repair of this product may be done by qualified and specialized technicians, to assure every procedure are carried out in accordance with applicable rules and norms. Nonprofessional and inexperienced users are expressly prohibited of taking any action, unless explicitly requested by specialized technicians to do so.
- Installations must be frequently inspected for unbalance and the wear signals of the cables, springs, hinges, wheels, supports and other mechanical assembly parts.
- Do not use the product if it is necessary repair or adjustment is required.
- When performing maintenance, cleaning and replacement of parts, the product must be disconnected from power supply. Also including any operation that requires opening the product cover.
- The use, cleaning and maintenance of this product may be carried out by any persons aged eight years old and over and persons whose physical, sensorial or mental capacities are lower, or by

persons without any knowledge of the product, provided that these are supervision and instructions given by persons with experienced in terms of usage of the product in a safe manner and who understands the risks and dangers involved.

- Children shouldn't play with the product or opening devices to avoid the motorized door or gate from being triggered involuntarily.

### **WARNINGS FOR TECHNICIANS**

- Before beginning the installation procedures, make sure that you have all the devices and materials necessary to complete the installation of the product.
- You should note your Protection Index (IP) and operating temperature to ensure that is suitable for the installation site.
- Provide the manual of the product to the user and let them know how to handle it in an emergency.
- If the automatism is installed on a gate with a pedestrian door, a door locking mechanism must be installed while the gate is in motion.
- Do not install the product "upside down" or supported by elements do not support its weight. If necessary, add brackets at strategic points to ensure the safety of the automatism.
- Do not install the product in explosive site.
- Safety devices must protect the possible crushing, cutting, transport and danger areas of the motorized door or gate.
- Verify that the elements to be automated (gates, door, windows, blinds, etc.) are in perfect function, aligned and level. Also verify if the necessary mechanical stops are in the appropriate places.
- The central must be installed on a safe place of any fluid (rain, moisture, etc.), dust and pests.
- You must route the various electrical cables through protective tubes, to protect them against mechanical exertions, essentially

on the power supply cable. Please note that all the cables must enter the central from the bottom.

- If the automatism is to be installed at a height of more than 2,5m from the ground or other level of access, the minimum safety and health requirements for the use of work equipment workers at the work of Directive 2009/104/CE of European Parliament and of the Council of 16 September 2009.
- Attach the permanent label for the manual release as close as possible to the release mechanism.
- Disconnect means, such as a switch or circuit breaker on the electrical panel, must be provided on the product's fixed power supply leads in accordance with the installation rules.
- If the product to be installed requires power supply of 230Vac or 110Vac, ensure that connection is to an electrical panel with ground connection.
- The product is only powered by low voltage safety with central (only at 24V motors)

### **WARNINGS FOR USERS**

- Keep this manual in a safe place to be consulted whenever necessary.
- If the product has contact with fluids without being prepared, it must immediately disconnect from the power supply to avoid short circuits, and consult a specialized technician.
- Ensure that technician has provided you the product manual and informed you how to handle the product in an emergency.
- If the system requires any repair or modification, unlock the automatism, turn off the power and do not use it until all safety conditions have been met.
- In the event of tripping of circuits breakers or fuse failure, locate the malfunction and solve it before resetting the circuit breaker or replacing the fuse. If the malfunction is not repairable by

consult this manual, contact a technician.

- Keep the operation area of the motorized gate free while the gate is in motion, and do not create strength to the gate movement.
- Do not perform any operation on mechanical elements or hinges if the product is in motion.

### RESPONSABILITY

- Supplier disclaims any liability if:
  - Product failure or deformation result from improper installation use or maintenance!
  - Safety norms are not followed in the installation, use and maintenance of the product.
  - Instructions in this manual are not followed.
  - Damaged is caused by unauthorized modifications
  - In these cases, the warranty is voided.

#### **MOTORLINE ELECTROCELOS SA.**

Travessa do Sobreiro, nº29  
4755-474 Rio Côvo (Santa Eugénia)  
Barcelos, Portugal

### SYMBOLS LEGEND:



• Important safety notices



• Useful information



• Programming information



• Potentiometer information




• Connectors information



• Buttons information


The **MC60** is a control board with built-in radio control system, developed for the automation of sliding, sectional gates, barriers or 24V electromechanical bollard.

• Power Supply	20 Vac
• Flashing light's output	24VDC 4W Max.
• RGB Flashing light's output	24Vdc 100mA Max.
• Motor's output	24Vdc 180W Max.
• Auxiliary accessories output	24V DC 8 W Max.
• Security device output and push button	24V DC
• Working temperature	-25°C to + 55°C
• Incorporated Radio Receiver	433,92 Mhz
• Compatible remote controls	12bits or Rolling Code
• Maximum Memory Capacity	100 (full opening) - 100 (pedestrian opening)
• Control Board Dimensions	130x107 mm
• Fuse	8AL 250V

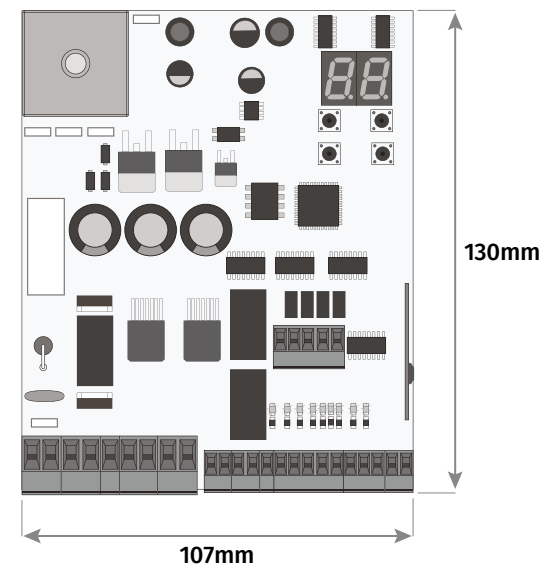

## 02. CONTROL BOARD


## CONNECTORS

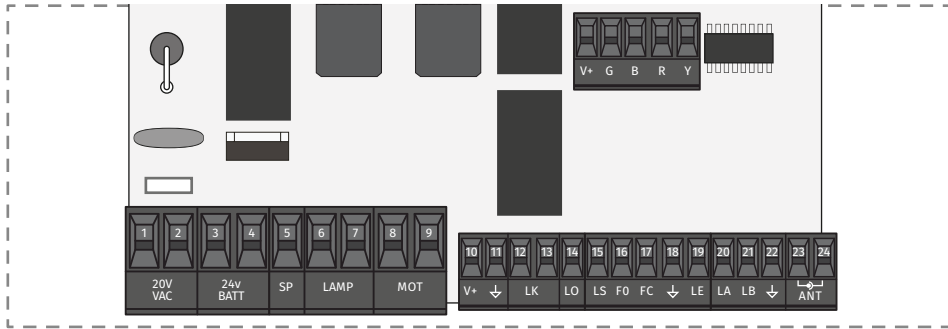


VAC	01 • Power Supply Input - 20Vac 02 • Power Supply Input - 20Vac
BATT	03 • 24Vdc Input for Emergency Battery 24V + max 7Ah 04 • COM Input (Solar Panel or Emergency Battery) 05 • 24Vdc Input for Solar Panel (28V max. 30W)
LAMP	06 • 24Vdc Flashing light's Output (max 4W) 07 • 0V Flashing light's Output
MOT	08 • 24Vdc Motor Output (max 180W) 09 • 24Vdc Motor Output (max 180W)
V+ ↓	10 • 24Vdc output for accessories (max 8W) 11 • 0V output for accessories power supply
LK	12 • 24Vdc Electric Lock Output (max 12W) 13 • 0V Electric Lock Output
LO	14 • Total Opening Input (NO)
LS	15 • Pedestrian Opening Input (NO)
FO	16 • Opening limit-switch input
FC	17 • Closing limit-switch input
↓	18 • Common
LE	19 • Exterior Photocells input (NC)
LA	20 • Interior Photocells input (NC)
LB	21 • NC input for emergency device
↓	22 • Common
ANT	23 • Antenna hot pole input 24 • Antenna mass input

## 02. CONTROL BOARD


## BUTTONS AND LEDs

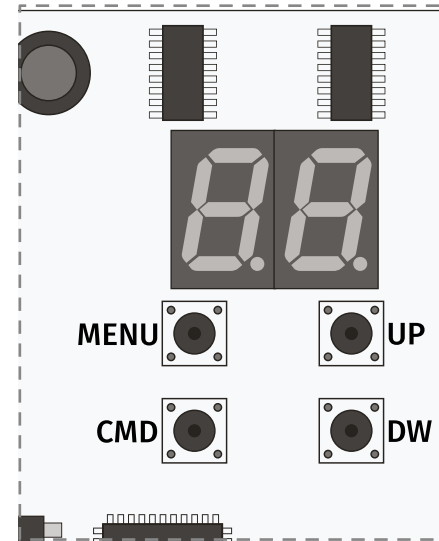


- MENU** • Access the Menu
- CMD** • Remote controls programmation
- UP** • Navigate through menus/values
- DW** • Navigate through menus/values

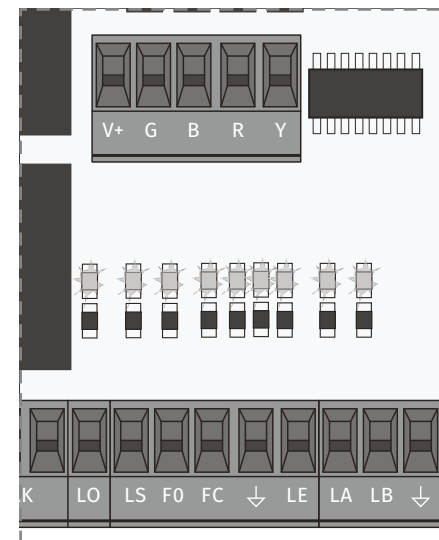



- LO** • LED ON when total opening input is active
- LS** • LED on when the pedestrian opening input is active
- FO** • LED OFF when the opening limit switch is active
- FC** • LED OFF when closing limit switch is active
- LE** • LED OFF when the signal from the exterior photocells is interrupted
- LA** • LED OFF when the signal from the interior photocells is interrupted
- LB** • LED OFF when the safety button is active
- BT** • LED ON when the battery turned on backwards
- VDD** • LED ON when power is supplied to the microcontroller

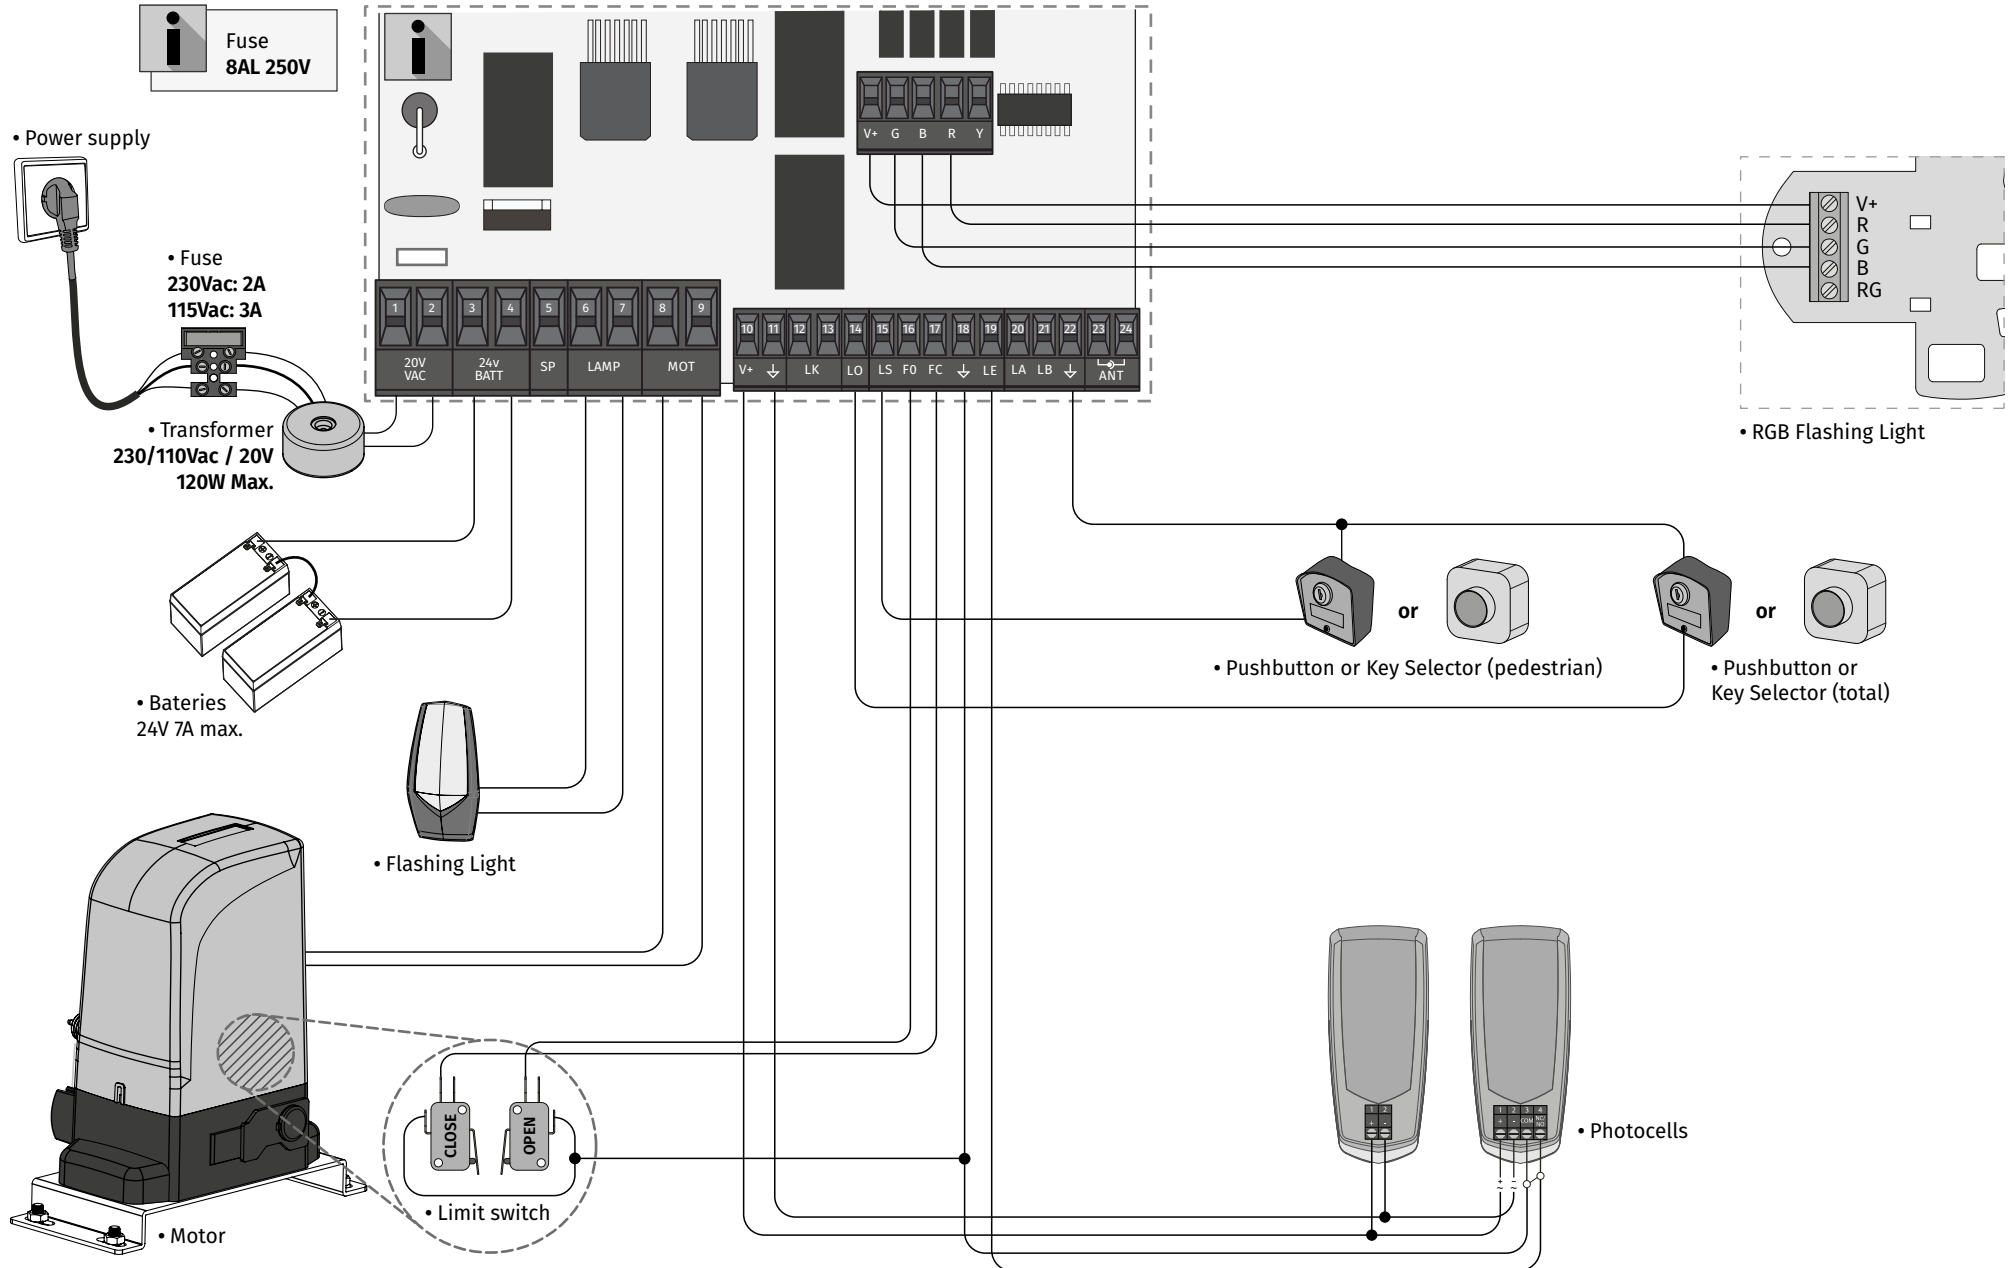




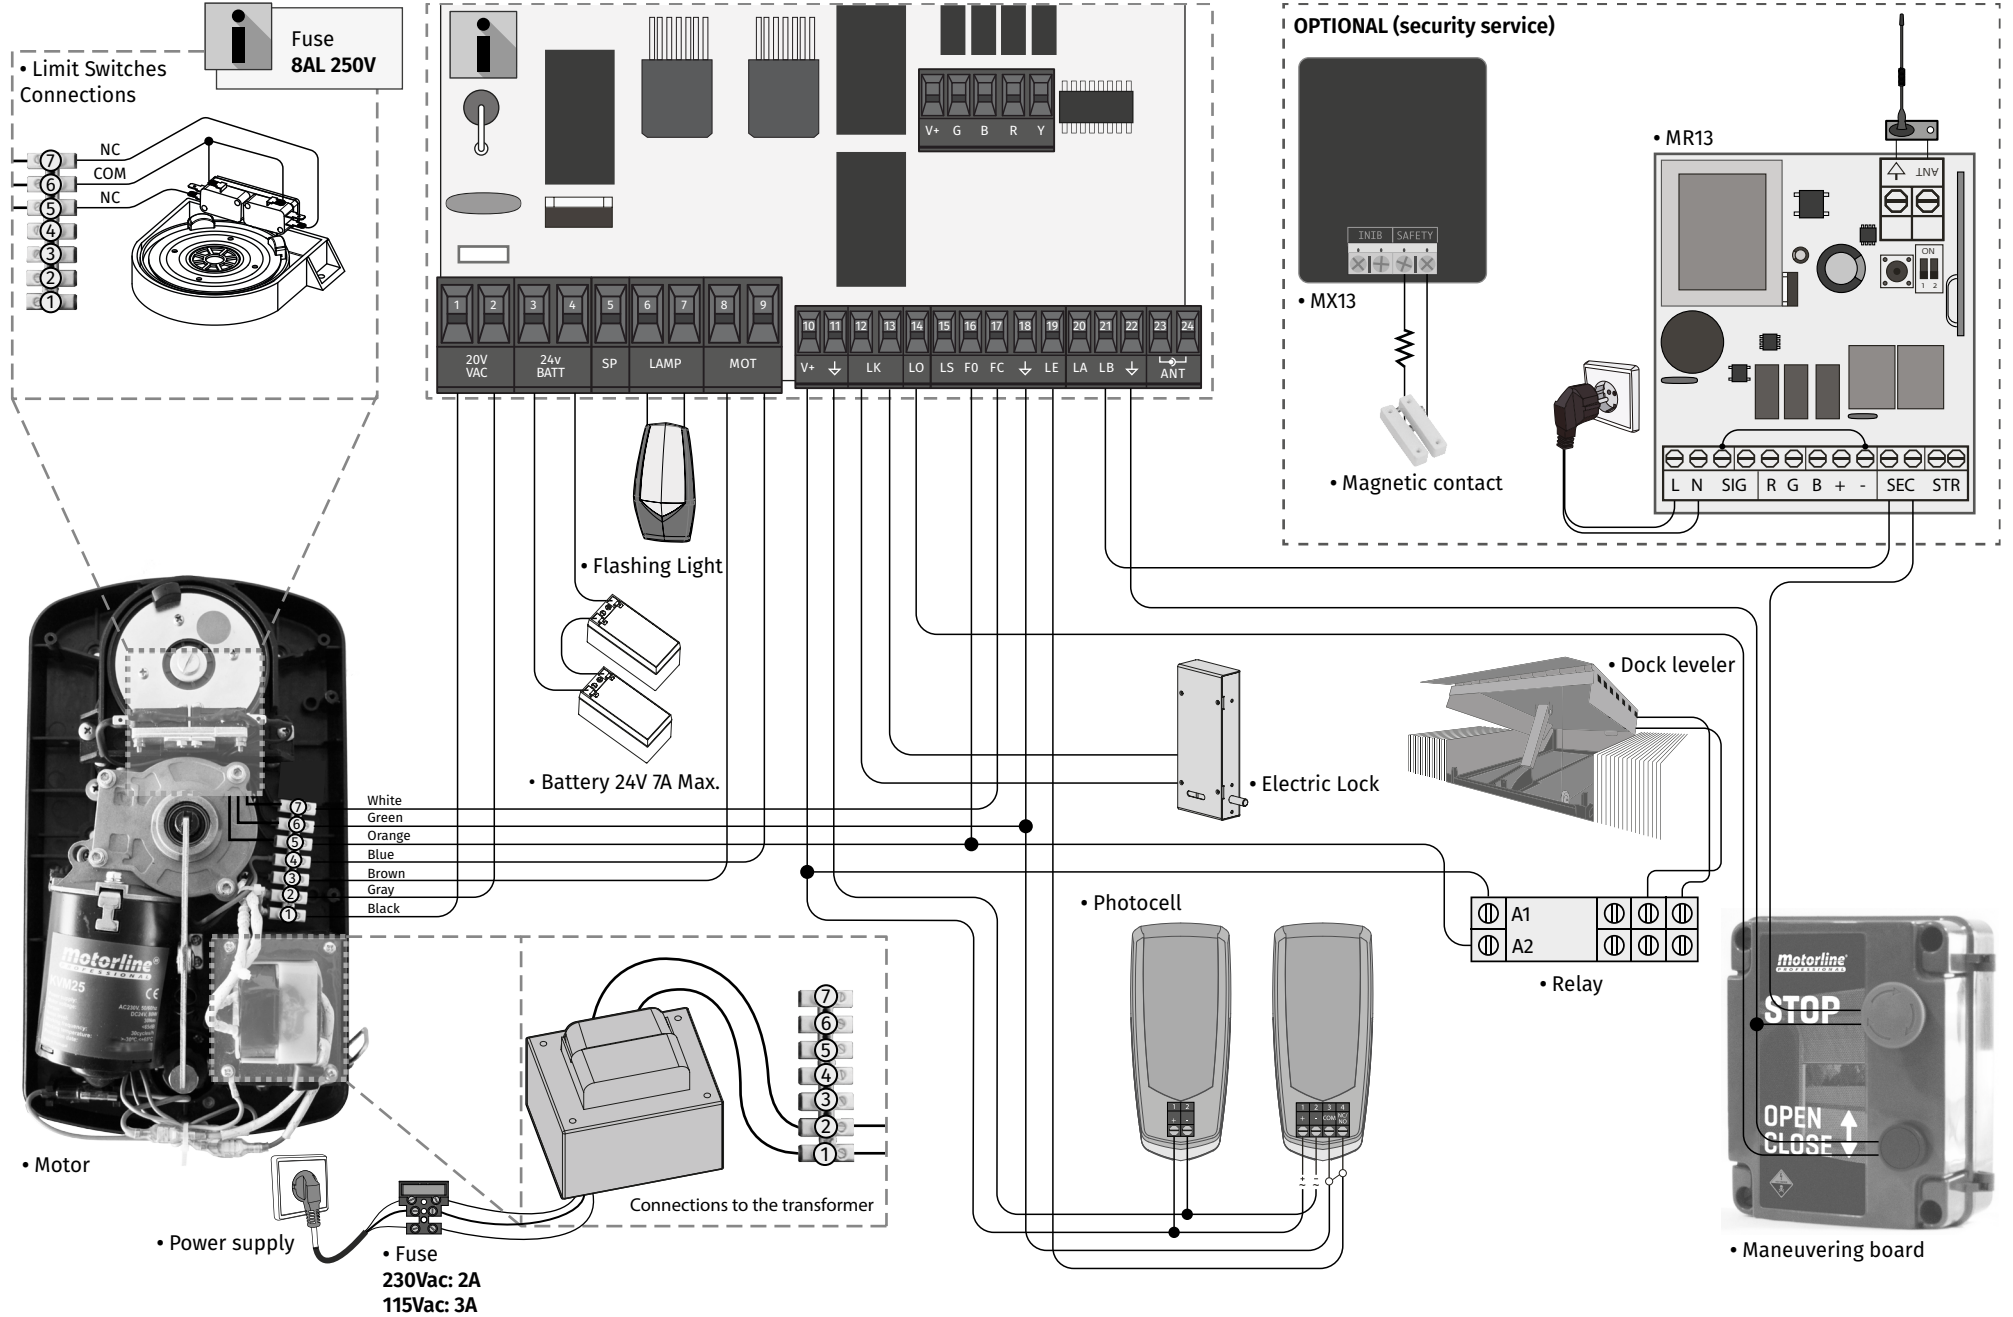




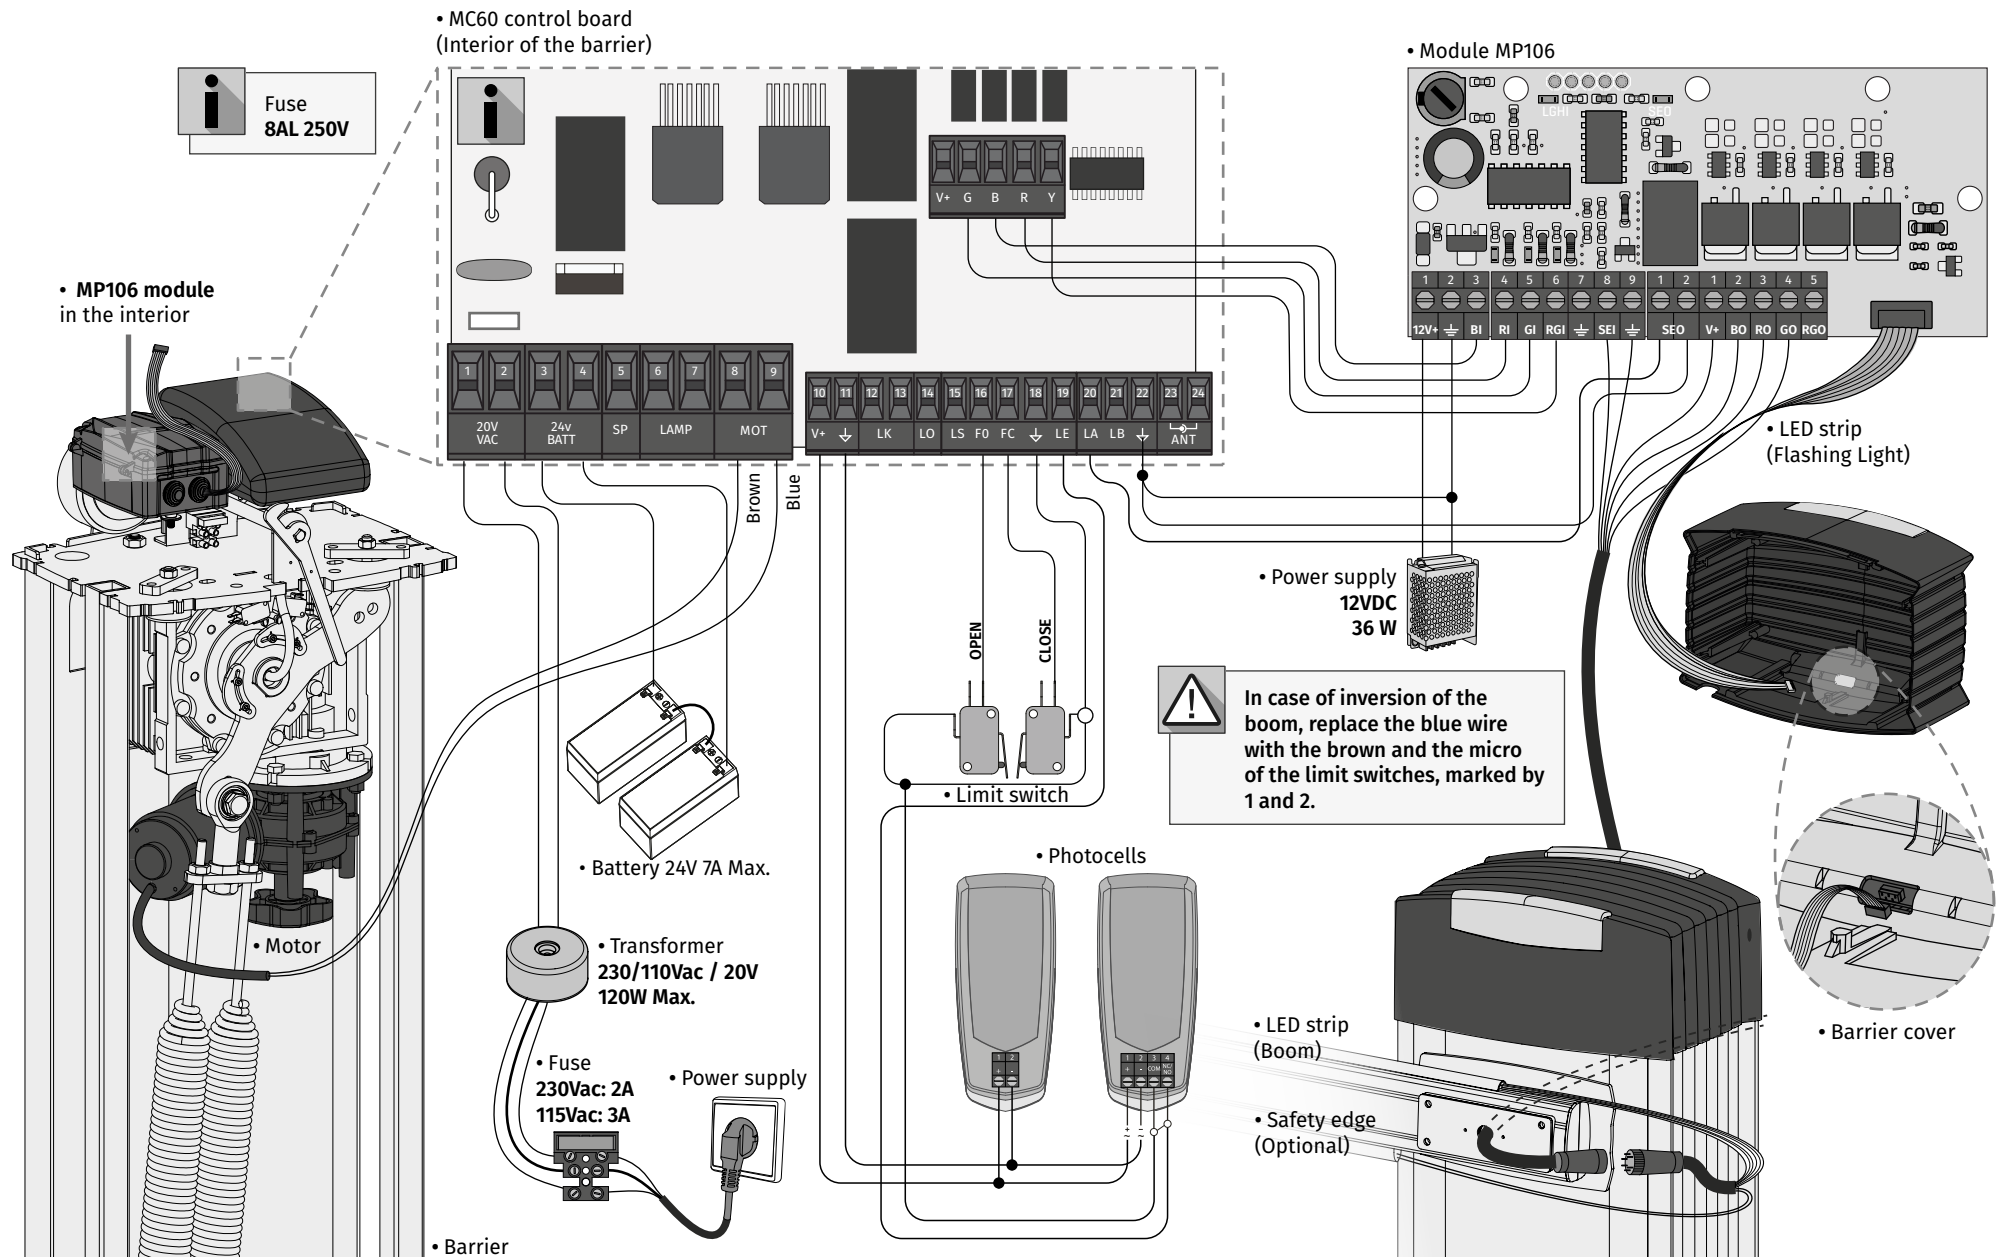

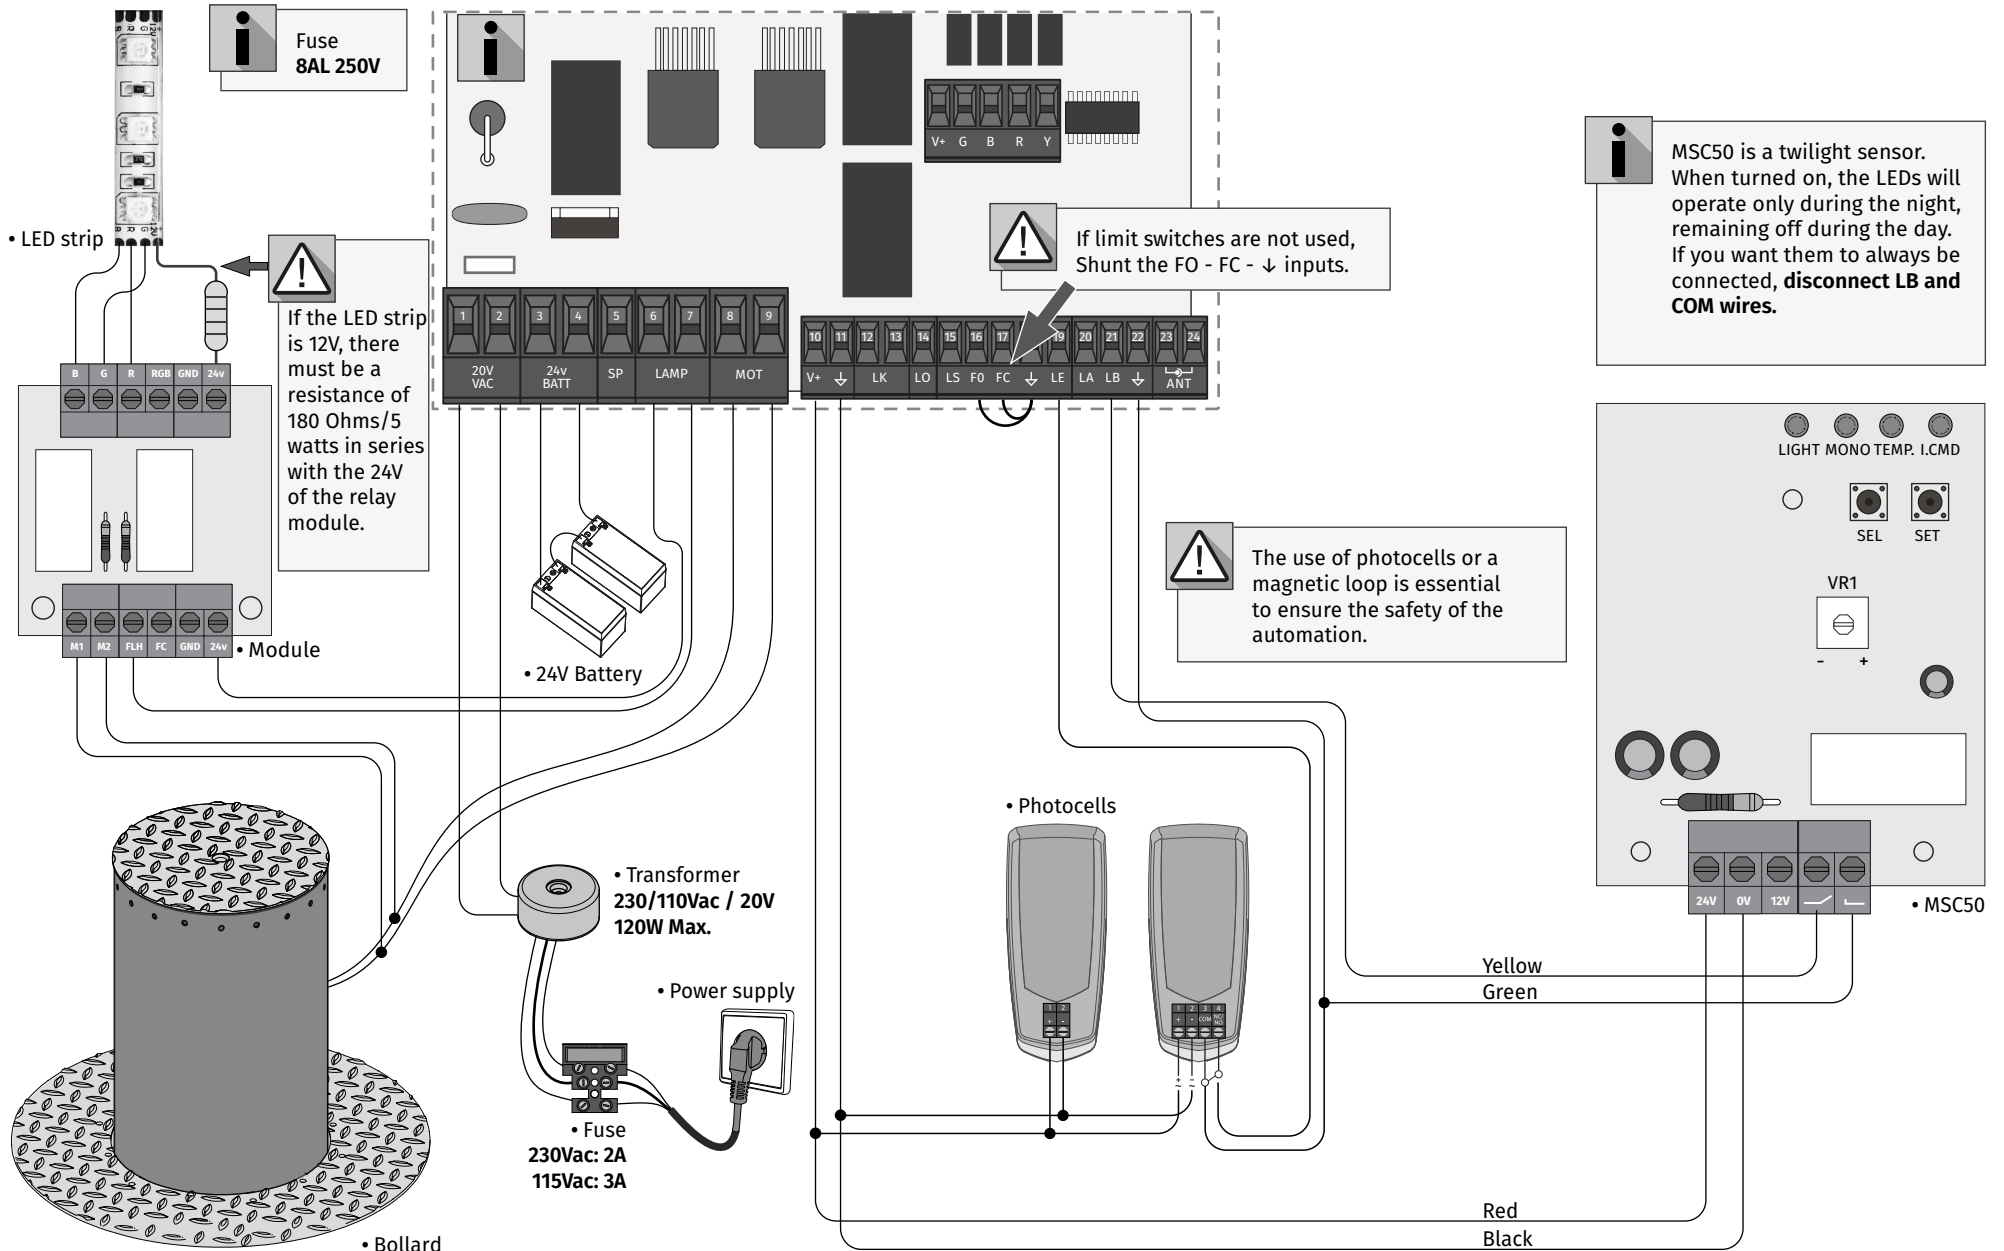

**!** To use this mode, select the function at P0 (page 14B).  
The values are updated automatically.

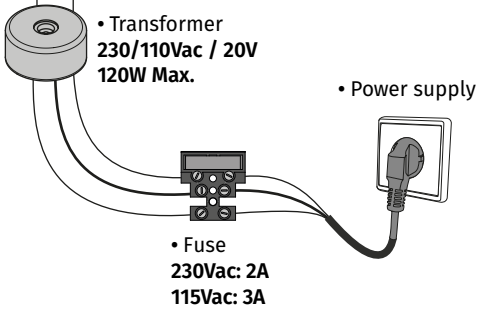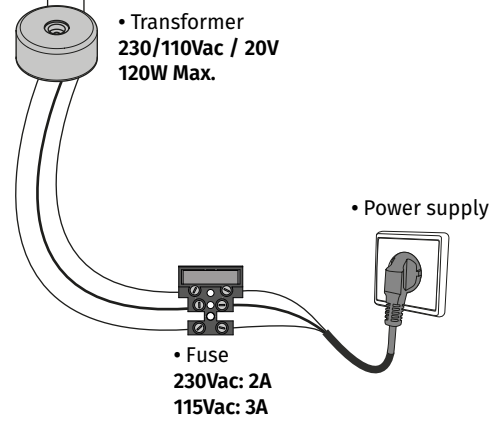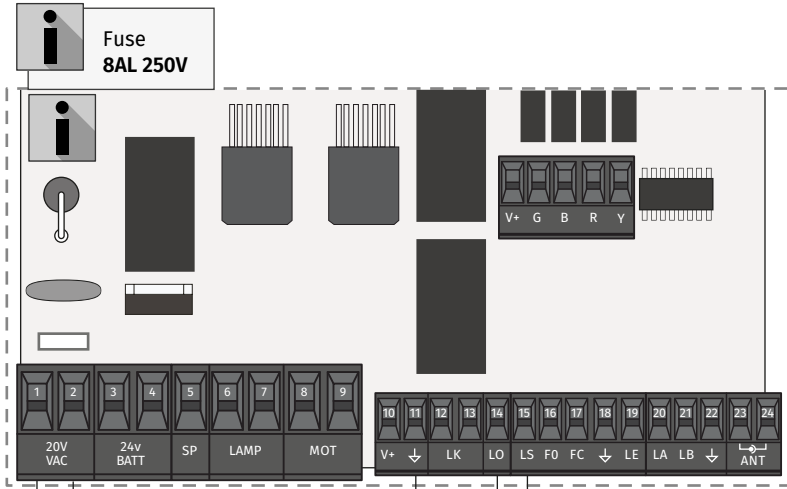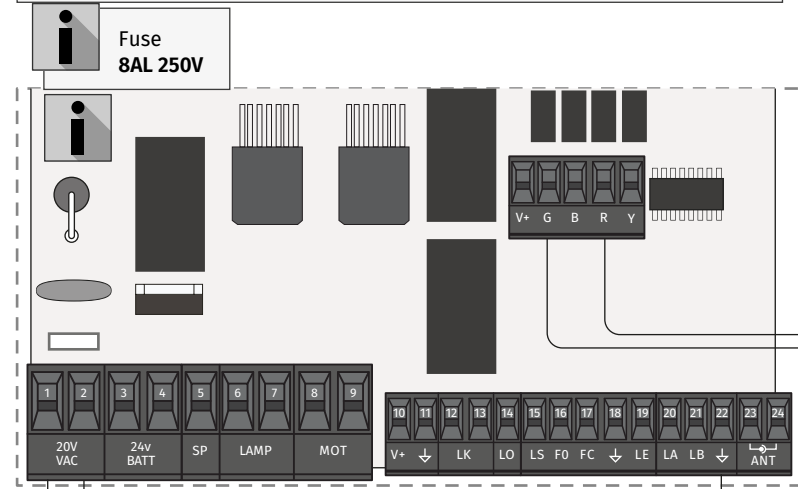



The installation process assumes that the gate already has mechanical or electrical limit switches installed. For more information read the motor's manual.

- 01 • Connect all accessories according to the connections diagram.
- 02 • Connect the control board to a 20V power supply
- 03 • Check if the gate movement is the same as shown on the display:

00

CLOSE

00

OPEN



If the display does not match the movement of the gate, switch off the power supply control board and change the wires of Motor (8 and 9) and check the direction of the limit switches.


- 04 • Make a manual course programming - menu **P0** (page 14B).
- 05 • If necessary, adjust the slowdown time of the gate at opening and closing - menu **P1** (page 15A).
- 06 • Adjust motor force and sensitivity - menu **P2** (page 15A).
- 07 • Make a manual programming of the course again - menu **P0** (page 14B).
- 08 • Enable or disable the use of Photocells in menu **P5** and **P6** (page 16A and 16B).
- 09 • Program a remote control (page 12B).

The control board is now fully configured!  
Check the pages of the menu programming if you want to configure other features of the Control board.


**SU** Remote control programming for total opening.

**SP** Remote control programming for pedestrian opening.


#### • PROGRAMMING REMOTE CONTROLS




01 • Press the cmd button for 1 sec.



02 • Select the function where you want to program the remote controls (SU or SP) use ↓ ↑.



03 • Press cmd once to confirm the function. (SU or SP).




04 • The first free position appears.




05 • Press the remote controls button you want to program. The display will blink and move to the next free location.


#### • ERASE REMOTE CONTROLS




01 • Press the cmd button for 1 sec.




02 • Select a function (SU or SP) use ↓ ↑.



03 • Press cmd once to confirm the function. (SU or SP).




04 • Use ↓ ↑ to select the remote controls location you want to delete.



05 • Press cmd for 3 sec and the location will be empty. The display will blink and the position will be free.

#### • ERASE ALL THE REMOTE CONTROLS



01 • Press the cmd button for 5 sec.  
02 • The display will show dL, confirming that all remote controls have been erased.




• Whenever you store or delete a remote control, the display will flash and show the next position. You can add or delete remote controls without going back to point 01.



• If you do not press any button for 10 sec. the control board will return to standby



 We can only go into programming with the gate electrically stopped.

The functions of the control board are divided into 2 areas:

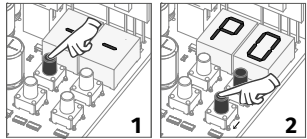


**"P" MENU**

- 1 • To access the P menu press the MENU button for 1 sec.
- 2 • Use ↓ ↑ to navigate through the menus.
- 3 • Press MENU when you want to confirm access to a menu.
- 4 • Press ↓ ↑ simultaneously to exit programming.

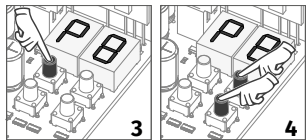

**"E" MENU**


- 1 • To access the E menu press the MENU button for 5 sec.
- 2 • Use ↓ ↑ to navigate through the menus.
- 3 • Press MENU when you want to confirm access to a menu.
- 4 • Press ↓ ↑ simultaneously to exit programming.

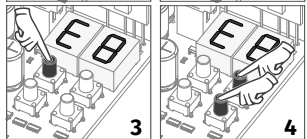

MENU	SUB-MENU	SC	SE	BR	PL
P1	F0	0	0	25	30
P1	F2	0	0	25	30
P2	F0	5	5	9	5
P2	F2	5	5	9	5
P2	F5	5	5	7	5
P7	-	1	1	2	2
E0	Lb	0	1	0	2
E5	EL	0	1	0	0
E6	S0	5	5	2	5
E6	S2	5	5	1	5

MENU	FUNCTION	MIN.	MAX.	STATE	FACTORY VALUE	PAGE
P0	Course Programming	-	-	RU Automatic Programming	sc	14B
				UR Manual Programming		
	System type	S2 Sliding gates				
		S9 SE Sectional gates				
		BR Electromechanical barriers				
		PL Bollard				
Master/Slave	00 Master	0	01 Slave			
	P1		Slowdown time adjustment	0s	9.9s	See table p.13A
dR Opening slowdown						
dF Closing slowdown						
P2	Force and sensitivity adjustment	0	9	F0 Force Adjustment in Opening	See table p.13A	15A
				F2 Force Adjustment in Closing		
				F5 Sensitivity adjustment		
P3	Pedestrian Course time	0s	99s	Time setting in pedestrian mode	10s	15B
P4	Pause time	0s	99s	RF Total pause time adjustment	0s	15B
				RP Pedestrian pause time adjustment		
P5	Photocells 1 programming	-	-	LE 00 Disables photocells	00	16A
				01 Active photocells		
				HC 00 Photocells in opening		
				01 Photocells in closing		
P6	Photocells 2 programming	-	-	HL 00 Invert	00	16B
				01 STOP		
				02 Invert 2 sec. and Stop		
				LR 00 Disables photocells		
P7	Operating logic	-	-	00 Disables photocells	00	16B
				01 Active photocells		
				HC 00 Photocells in opening		
				01 Photocells in closing		
P8	Flashing light	-	-	HL 00 Invert	01	17A
				01 STOP		
				02 Invert 2 sec. and Stop		
P9	Remote programming	-	-	HR 00 Disables safety edge input	00	17A
				01 Activates safety edge input		
P7	Operating logic	-	-	00 Automatic mode	01	16B
				01 Step by step mode		
				02 Condominium mode		
P8	Flashing light	-	-	00 Flashing (opening and closing)	00	17A
				01 Step by step mode		
				02 Courtesy light		
P9	Remote programming	-	-	00 Distance PGM OFF	00	17A
				01 Distance PGM ON		

MENU	FUNCTION	MIN.	MAX.	STATE	FACTORY VALUE	PAGE
E0	Human presence	-	-	HP 00 Disables Human presence 01 Active at closing 02 Active during opening and closing	00	17B
				PL 00 Disables push buttons mode 01 Activates push buttons mode	00	
				LB 00 Disables emergency device input 01 Activates input for Emergency device 02 Active input for twilight sensor	00	
E1	Soft start	-	-	00 Deactivates Soft start 01 Activates Soft start	00	18A
E2	Courtesy light time	0	99	Courtesy light time adjustment	00	18A
E3	Follow me	-	-	FL 00 Desactivates follow me 01 Activates follow me (fully open) 02 Activates follow me (in open or fully open position)	00	18B
				1s 9s E3 Set closing time (sec)		
E4	Course time adjustment	1m 4m	00	00 Opening course time (minutes)	00	18B
		0s 59s	05	05 Opening course time (seconds)	10s	
		1m 4m	00	00 Closing course time (minutes)	00	
		0s 59s	05	05 Closing course time (seconds)	10s	
E5	Brake/Lock/-strokes	-	-	EB 00 Disables electronic brake 01 Active electronic brake	00	19A
				EL 00 Activates lock on opening 01 Activates lock with polarity	See table p.13A	
E6	Slowdown Speed	0	9	5a Adjusting the slowing down at the opening 5c Adjusting the slowing down at the closing	See table p.13A	19A
E7	Manuevers counter	-	-	Shows the number of manuevers	-	19B
E8	Reset - Restore factory settings	-	-	00 Deactivated 01 Reset activated	00	20
E9	RGB Output	-	-	00 Continued output 01 Intermittent output	00	20

AU	<p><b>Automatic course programming</b></p> <p>This menu allows you to automatic motor programming and slowdown.</p>  <p>To cancel the programming press the UP and DOWN buttons simultaneously. You can use the remote control instead of the MENU button.</p>	<p><b>Automatic programming:</b></p> <p>01 • Press MENU for 1 sec. until it appears PO.</p> <p>02 • Press MENU once until it appears AU.</p> <p>03 • Press MENU to start automatic programming. The following maneuvers will be carried out:</p> <p>a • Closes in slowdown (if it's open).</p> <p>b • Opens in slowdown.</p> <p>c • Closes in slowdown.</p> <p>d • Opens at normal speed.</p> <p>e • Closes at normal speed.</p>	
		<p><b>Manual programming:</b></p> <p>01 • Press MENU for 1 sec. until it appears PO.</p> <p>02 • Press MENU once until it appears AU.</p> <p>03 • Press UP until it appears RA.</p> <p>04 • Press MENU to start programming the opening time.</p> <p>05 • Press MENU to start programming the slowdown time at the opening.</p> <p>06 • Press MENU to start programming the closing time.</p> <p>07 • Press MENU to start programming the slowdown time at closing.</p> <p>08 • Press MENU to finish programming.</p>	
SA	<p><b>Manual course programming</b></p> <p>This menu allows manually program the motor and slow down.</p>	<p><b>System type</b></p> <p>This menu allows you to program the type of system with which the control board will work.</p>	
SY	<p><b>System type</b></p> <p>This menu allows you to program the type of system with which the control board will work.</p>	<p>Sliding gates: Emergency device deactivated Deactivate Push button function Opening ramp time at 0 Closing ramp time at 0</p>	<p><b>Programming system type:</b></p> <p>01 • Press MENU for 1 sec. until it appears PO.</p> <p>02 • Press MENU once until it appears AU.</p> <p>03 • Press UP until it appears SY.</p> <p>04 • Press MENU to select one of the systems.</p>
		<p>Sectional doors: Emergency device activated Disables func. pushbutton Ramp time at opening to 0 Ramp time at closing to 0 Activates lock with polarity</p>	
		<p>Electromechanical barriers: Emergency device disabled Disables func. pushbutton Ramp time at opening to 25 Ramp time at closing to 25 Activates lock on opening</p>	
		<p>Bollard: Deactivate Push button function Opening ramp time at 30 Closing ramp time at 30</p>	
MS	<p><b>Master/Slave</b></p> <p>Communication model for hardware devices where one device has one-way control over another device.</p>	<p>00 <b>Master</b> Controls the main functions of the Slave</p>	<p><b>Programming Master/Slave:</b></p> <p>01 • Press MENU for 1 sec. until it appears PO.</p> <p>02 • Press MENU until it appears MS.</p> <p>03 • Select 00 or 01.</p> <p>04 • Press MENU to confirm a function.</p>
		<p>01 <b>Slave</b> It is controlled by the Master</p>	

## 05. PROGRAMMING "P"

### P.1 SLOWDOWN TIME ADJUSTMENT

This menu allows to set the slowdown time at opening and closing.


<b>dr</b>	<b>df</b>
<b>Opening slowdown</b> Allows to set the time that the gate will act with slowdown in the opening. (Default value 3)	<b>Closing slowdown</b> Allows to set the time that the gate will act with slowdown in the closing. (Default value 3)
<b>PO</b>	<b>PE</b>
<b>Time ramp at the opening</b> Allows to set the slowdown ramp time at the opening. (Default value: SC=00; SE=00; BR=25; PL=30)	<b>Time ramp at the closing</b> Allows to set the slowdown ramp time at the closing. (Default value: SC=00; SE=00; BR=25; PL=30)





- 01 • Press MENU for 2 sec. until appears **PO**.
- 02 • Use UP to change to **P.1**.
- 03 • Press MENU until appears **dr**. Use UP or DW to navigate the parameters.
- 04 • Press MENU to edit the chosen parameter value.
- 05 • The factory set time appears. Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

## 05. PROGRAMMING "P"

### P.2 FORCE AND SENSITIVITY ADJUSTMENT

 A very low value in this parameter F0 or Fc, can cause the motor not to have enough torque to move the gate, or FS too high.

<b>F0</b>	<b>FE</b>	<b>FS</b>
<b>Opening force adjustment</b> Allows to set the force that is injected into the opening when the motor moves at normal speed.	<b>Closing force adjustment</b> Allows to set the force that is injected into the closing when the motor moves at normal speed.	<b>Sensitivity adjustment</b> Allows to adjust the sensitivity of the motor when detecting obstacles. The higher the sensitivity, the less effort it will take to detect any obstacle and reverse direction.



## 05. PROGRAMMING "P"

### P.2 FORCE AND SENSITIVITY ADJUSTMENT

- 01 • Press MENU for 2 sec. until appears **PO**.
- 02 • Use UP until appears **P.2**.
- 03 • Press MENU will appear **F0**.
- 04 • Press MENU to edit the value.
- 05 • The factory set time appears. Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

## 05. PROGRAMMING "P"

### P.3 PEDESTRIAN COURSE TIME

The pedestrian mode allows the gate to be opened for the passage of people, without it needing to open in its entirety. In this function you can schedule the time you want the gate to open.



**For pedestrian mode to work, it is necessary that the minimum work is 1 second, and 0 disables the pedestrian.**



- 01 • Press MENU for 2 sec. until appears **PO**.
- 02 • Use UP until appears **P.3**.
- 03 • Press MENU. The factory set time appears.
- 04 • Use UP and DW to change the value.
- 05 • Press MENU to save the new value.

## 05. PROGRAMMING "P"

### P.4 PAUSE TIME

<b>AF</b>	<b>AP</b>
<b>Pause time adjustment for automatic closing</b> Allows you to set the waiting time for the gate from when it finishes fully opening until it starts to close.	<b>Pause time adjustment for automatic closing in pedestrian closing</b> Allows you to set the waiting time since finish the pedestrian opening until it starts to close.



When the values are at zero, there is no automatic closing.

- 01 • Press MENU for 2 sec. until appears *P0*.
- 02 • Use UP to change to *P4*.
- 03 • Press MENU until appears *RF*. Use UP or DW to navigate the parameters.
- 04 • Press MENU to edit the chosen parameter value.
- 05 • The factory set time appears. Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

Allows to program the security behavior LE (photocell 1).

<i>LE</i>	<i>HE</i>	<i>HL</i>
<b>00 (disable photocells)</b> <b>01 (activate photocells)</b> Enable or disable security entry.	<b>00 (photocells in opening)</b> <b>01 (photocells in closing)</b> This menu can only be changed when the LE menu is active. Allows you to define whether this security will act on the opening or closing of the gate.	<b>00 (the gate is reversed)</b> <b>01 (gate stops and resumes 5 sec after security is disabled)</b> <b>02 (gate reverses for 2 sec. and stop)</b> It allows to define the behavior that the gate will have when this security is activated.
(Default value 0)	(Default value 1)	(Default value 0)

- 01 • Press MENU for 2 sec. until appears *P0*.
- 02 • Use UP until appears *P5*.
- 03 • Press MENU will appear *LE*. Use UP or DW to navigate the parameters.
- 04 • Press MENU to edit the chosen parameter value.
- 05 • The factory set time appears. Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

Allows to program the security behavior LA (photocell 2).

<i>LA</i>	<i>HC</i>	<i>HL</i>	<i>HA</i>
<b>00 (disable photocells)</b> <b>01 (activate photocells)</b> Enable or disable security entry.	<b>00 (photocells in opening)</b> <b>01 (photocells in closing)</b> This menu can only be changed when the LA menu is active. Allows you to define whether this security will act on the opening or closing of the gate.	<b>00 (the gate is reversed)</b> <b>01 (gate stops and resumes 5 sec after security is disabled)</b> <b>02 (gate reverses for 2 sec. and stop)</b> Allows to set the behavior that the gate will have when this security is activated.	<b>00 (disables safety edge)</b> <b>01 (active safety edge)</b>
(Default value 0)	(Default value 0)	(Default value 1)	(Default value 0)

- 01 • Press MENU for 2 sec. until appears *P0*.
- 02 • Use UP to change to *P6*.
- 03 • Press MENU until appears *LA*. Use UP or DW to navigate the parameters.
- 04 • Press MENU to edit the chosen parameter value.
- 05 • The factory set time appears. Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

This menu allows to set the operating logic of the automation

<i>00</i>	<i>01</i>	<i>02</i>
<b>Automatic Mode</b> Whenever there is an order the movement is reversed.	<b>Step by step mode</b> 1st impulse - OPEN 2nd impulse - STOP 3rd impulse - CLOSE 4th impulse - STOP If it is fully open and timed, it closes.	<b>Condominium Mode</b> Does not respond to orders during opening and pause time.
(Default value: SC=01; SE=01; BR=02; PL=02)		



- 01 • Press MENU for 2 sec. until appears *P0*.
- 02 • Use UP until appears *P7*.
- 03 • Press MENU will appear *00*.
- 04 • Press MENU to edit the value.
- 05 • Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

This menu allows to set the operation mode of the flashing light (LAMP).

<i>00</i>	<i>01</i>	<i>02</i>
<b>Flashing</b> (opening and closing) During the opening/closing movement of the gate, the flashing light will operate intermittently.  Opening - flashing 2s Closing - flashing 1s	<b>Step by step mode</b> In the opening and closing movement, the flashing light is permanently ON.  When stopped, it remains off.	<b>Courtesy light</b> In the opening and closing movement the flashing light is permanently ON. When in pause time remains ON.  When stopped or closed, remains on for the time set in E2.
Default value (00)		

- 01 • Press MENU for 2 sec. until appears *P0*.
- 02 • Use UP until appears *P8*.
- 03 • Press MENU will appear *00*.
- 04 • Press MENU to edit the value.
- 05 • Use UP and DW to change the value.
- 06 • Press MENU to save the new value.


<i>00</i>	<i>01</i>
Distance PGM OFF	Distance PGM ON
This menu allows to enable or disable the programming of new remote control without directly accessing the control board, using a previously stored remote control (memorize remote controls page 11B).	
Default value (00)	

- 01 • Press MENU for 2 sec. until appears *P0*.
- 02 • Use UP until appears *P9*.
- 03 • Press MENU will appear *00*.
- 04 • Press MENU to edit the value.
- 05 • Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

#### Remote Programming Operation (PGM ON):



- Press the buttons indicated in the image simultaneously for 10 seconds and the flashing light will flash (the 1st free position appears in the display). Each time you store 1 remote control, the control board will exit remote programming. If you want to memorize more remote control, you will always have to repeat the process of pressing the remote controls buttons simultaneously for 10 seconds for each new remote control.

<i>HP</i>	<i>PL</i>	<i>LB</i>									
<b>00 (disables human presence)</b> Whenever a order to is sent to the LO input and the motor performs a complete maneuver.  <b>Human presence 01 (active at closing)</b> The motor only works if you keep the LS button pressed.  <b>Human presence 02 (active during opening and closing)</b> The motor only works if you keep the LO or LS button pressed depending on the desired action.   <b>When human presence active, the RF remote controls do not work.</b>	<b>00 (disables pushbutton mode)</b>  <b>01 (active pushbutton mode)</b> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th> <th>LS</th> <th>LO</th> </tr> </thead> <tbody> <tr> <th>01 ACTIVE</th> <td>Full closing</td> <td>Full opening</td> </tr> <tr> <th>00 OFF</th> <td>Pedestrian opening</td> <td>Full opening</td> </tr> </tbody> </table>		LS	LO	01 ACTIVE	Full closing	Full opening	00 OFF	Pedestrian opening	Full opening	Allows you to define the way Operation of the LB input  <b>00 (disables input to emergency stop device)</b>  <b>01 (input for emergency stop)</b>  <b>02 (input for twilight sensor - outputs for LEDs that work at night and remain off during the day).</b> (NOTE: This option is only available in the PL version)
	LS	LO									
01 ACTIVE	Full closing	Full opening									
00 OFF	Pedestrian opening	Full opening									
(Default value 00)		(Default value SC=00; SE=01; BR=00; PL=02)									

- 01 • Press MENU for 5 sec. until it appears *E0*.
- 02 • Press MENU until appears *HP*. Use UP or DW to navigate the parameters.
- 03 • Press MENU to edit the chosen parameter value.
- 04 • The factory set time appears. Use UP and DW to change the value.
- 05 • Press MENU to save the new value.

**00 function disabled**  
**01 function activated**

Enables or disables the soft start. With the soft start function activated, at each start of movement the control board will control the motor start, increasing the speed gradually in the first second of operation.

(Default value 01)

- 01 • Press MENU for 5 sec. until it appears **E0**.
- 02 • Use UP until appears **E1**.
- 03 • Press MENU will appear **00**.
- 04 • Press MENU to edit the value.
- 05 • Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

Allows to adjust the courtesy light time. The courtesy light is activated the set time when the gate is in the closed, opened and stopped position.

The E2 menu will only be available if the courtesy light function is activated in the P8 menu option 2 (see page 17A).

(Default value 00)

- 01 • Press MENU for 5 sec. until it appears **E0**.
- 02 • Use UP until appears **E2**.
- 03 • Press MENU will appear **00**.
- 04 • Press MENU to edit the value.
- 05 • Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

**FL**

**00 function disabled**  
**01 function activated after opening**

The control board activates the closing only after completing the opening, based on the time defined in the **E11** function

**02 function activated during opening**

The control board activates the closing after completing the opening, when, during opening, the user/object passes through the photocells, based on the time defined in the **E11** function

This menu allows activating the Follow me option. With this function activated, whenever the safety device detects the passage of a user/object, the control board activates the closing maneuver based on the time selected in this parameter.

(Default value 00)

- 01 • Press MENU for 5 sec. until **E0** appears.
- 02 • Press MENU until **FL** appears. Use UP or DW to navigate parameters.
- 03 • Press MENU to edit the value of the chosen parameter.
- 04 • Choose the desired value. Use UP and DW to change the value.
- 05 • Press MENU to save the new value.

**E11**

**01 - 09 closing time function**

Allows you to define the waiting time between detection and the start of the closing maneuver after the safety device detects the passage of an object/user.

Allows to adjust the working time for the opening and closing courses at normal speed

<b>011</b>	<b>05</b>	<b>E11</b>	<b>E5</b>
<b>Opening course time at normal speed (minutes)</b>	<b>Opening course time at normal speed (seconds)</b>	<b>Closing course time at normal speed (minutes)</b>	<b>Closing course time at normal speed (seconds)</b>
(Default value 0)	(Default value 10)	(Default value 0)	(Default value 10)

- 01 • Press MENU for 5 sec. until it appears **E0**.
- 01 • Use UP until appears **E4**.
- 02 • Press MENU will appear **011**. Use UP or DW to navigate the parameters.
- 03 • Press MENU to edit the chosen parameter value.
- 04 • The factory set time appears. Use UP and DW to change the value.
- 05 • Press MENU to save the new value.

Allows to activate the electronic brake and change the behaviour of the LK output (lock)

<b>E6</b>	<b>E8</b>
<p><b>00 (disables electronic brake)</b>  <b>01 (activates electronic brake)</b></p> <p>Allows you to activate the electronic brake.</p>	<p><b>00 (activates lock at opening 1 sec.)</b>  <b>01 (activates lock with polarity)</b></p> <p>Allows you to select how the lock works.</p>
Check tables on pages 13A, 13B and 14A	Check tables on pages 13A, 13B and 14A

- 01 • Press MENU for 5 sec. until it appears E0.
- 02 • Use UP until appears E5.
- 03 • Press MENU will appear E6. Use UP or DW to navigate the parameters.
- 04 • Press MENU to edit the chosen parameter value.
- 05 • The factory set time appears. Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

This menu allows you to adjust the slowdown speed.  
 The higher the level, the faster the slowdown.

<b>S8</b>	<b>S2</b>
<p><b>Setting of the slowdown speed at the opening</b></p> <p>Allows you to adjust the slowdown speed in the motor opening.</p>	<p><b>Setting of the slowdown speed at the closing</b></p> <p>Allows you to adjust the slowdown speed in the motor closing.</p>
<p>min. 0 max. 9</p> <p>(Default value: SC=05; SE=05; BR=02; PL=05)</p>	<p>min. 0 max. 9</p> <p>(Default value: SC=05; SE=05; BR=01; PL=05)</p>

- 01 • Press MENU for 5 sec. until it appears E0.
- 02 • Use UP until appears E6.
- 03 • Press MENU will appear S8.
- 04 • Press MENU to edit the value.
- 05 • Use UP and DW to change the value.
- 06 • Press MENU to save the new value.


This menu allows checking how many complete maneuvers were performed by the control board (complete maneuver means opening and closing).




**Resetting the control board does not clear the maneuver count.**

**Example:** 130371 maneuvers


13- Hundred thousand / 03- Thousands / 71- Dozens




01 • Press MENU for 10 seconds.





02 • E0 appears. Press UP until appears E7.



03 • Press MENU.



04 • The maneuvers count is displayed in the following order (example: 130 371)



05 • E8 appears.

## 06. PROGRAMMING "E"

## *E8* RESET - RESET FACTORY VALUES



Resetting the control board does not erase the maneuver count.

00

00

Disabled

Reset enabled

(Default value 00)

- 01 • Press MENU for 5 sec. until it appears *E0*.
- 02 • Use UP until appears *E8*.
- 03 • Press MENU will appear *00*.
- 04 • Press MENU to edit the value.
- 05 • Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

## 06. PROGRAMMING "E"

## *E9* RGB OUTPUT

00

00

Continuous light

Flashing light

(Default value 00)

- 01 • Press MENU for 5 sec. until it appears *E0*.
- 02 • Use UP until appears *E9*.
- 03 • Press MENU will appear *00*.
- 04 • Press MENU to edit the value.
- 05 • Use UP and DW to change the value.
- 06 • Press MENU to save the new value.

MENU	DESCRIPTION	MENU	DESCRIPTION
88	In stop position, fully open	88	All remote controls erased
88	In stop position, intermediate position	00 01 02	Remote control triggered from the indicated position
88	In stop position, fully closed	0E	Obstructed photocell
00	Full opening button pressed	0A	Obstructed photocell
05	Pedestrian opening button pressed	AF	In pause time
0P	Control board performs the opening course	AP	In pedestrian pause time
00	Control board performs the closing course	91	Motor overcurrent detection
F0	End of opening course time	06	Emergency device activated
F0	End of closing course time	HA	Safety edge pressed
0U	Full memory		

Anomaly	Procedure	Behavior	Procedure II	Discovering the origin of the problem			
• Motor doesn't work.	• Make sure you have power supply connected to the automatism and if it is working.	• Still not working.	• Consult a MOTORLINE technician.	<p>1 • Open control board and check if it has power supply.</p> <p>2 • Check input fuses of the control board.</p>	<p>3 • Disconnect motor from control board and test it by connecting directly to 12/24V power supply in order to find out if it has the problems.</p>	<p>4 • If the motor works, the problem is on the control board. Pull it out and send it to our MOTORLINE technical services for diagnosis.</p>	<p>5 • If the motor doesn't work, remove from installation site and send it to our MOTORLINE technical services for diagnosis.</p>
• Motor doesn't move but makes noise.	• Unlock the motor and move the gate/barrier/automatic bollard by hand to check for mechanical problems.	• Encountered problems?	• Consult a qualified technician in gate/barrier/automatic bollard.	Check all motion axis and associated motion systems related with the gate/barrier/automatic bollard (wheels,	racks, etc) to find out what is the problem.		
		• The gate/barrier/automatic bollard moves easily?	• Consult a MOTORLINE technician.	<p>1 • If the motor works, the problem is with control board. Pull it out and send it to our MOTORLINE technical services for</p>	<p>diagnosis.</p> <p>2 • If the motor doesn't work, remove it from installation</p>	<p>site and send it to our MOTORLINE technical services for diagnosis.</p>	
• Motor opens but doesn't close.	• Unlock the motor and move the gate/barrier/automatic bollard by hand to closed position. Block the motor again. Turn off power supply for 5 seconds, and reconnect. Send order to open using remote control.	• The gate/barrier/automatic bollard opened but didn't close again.	<p>1 • Check if there is any obstacle in front of the photocells.</p> <p>2 • Check if any of the control devices (Key Selector, Pushbutton, Video Intercom, etc.) are stucked and sending permanent signal to control board.</p> <p>3 • Consult a MOTORLINE technician.</p>	<p>All control boards MOTORLINE have LEDs that easily allow to conclude which devices are with anomalies. All safety device (DS) LEDs in normal situations remain ON. All "START" circuits LEDs in normal situations remain Off.</p> <p>If LEDs devices are not all On, there is some security systems malfunction (photocells, safety edges). If "START" LEDs are on, there is some command issuing device emitting a permanent signal.</p>	<p><b>A) SECURITY SYSTEMS:</b></p> <p>1 • Close with a shunt all safety systems on the control board. If the automated system starts working normally check for the problematic device.</p> <p>2 • Remove one shunt at a time until you find the malfunction device.</p> <p>3 • Replace it for a functional device and check if the motor works correctly with all the other devices. If you find another one defective, follow the same steps until you find all the problems.</p>	<p><b>B) START SYSTEMS:</b></p> <p>1 • Disconnect all wires connected to the START connector (LO and LS).</p> <p>2 • If the LED turned OFF, try reconnecting one device at a time until you find the defective device.</p>	<p><b>NOTE:</b></p> <p>In case procedures described in sections A) and B) don't result, remove control board and send it to our MOTORLINE technical services for diagnosis.</p>
• Motor doesn't make complete course.	• Unlock the motor and move the gate/barrier/automatic bollard by hand to check for mechanical problems.	• Encountered problems?	• Consult a qualified technician in gate/barrier/automatic bollard.	Check all motion axis and associated motion systems related with the gate/barrier/automatic bollard (wheels,	racks, etc) to find out what is the problem.		
		• The gate/barrier/automatic bollard moves easily?	• Consult a MOTORLINE technician.	<p>1 • If the motor doesn't work, remove it from installation site and send it to our MOTORLINE technical services for diagnosis.</p> <p>2 • If the motor works well and move gate at full force during the entire course, the problem is with control board. Set force using trimmer on the board. Make a new working time programming, giving sufficient</p>	<p>time for opening and closing with appropriate force.</p> <p>3 • If this doesn't work, remove control board and send it to MOTORLINE technical services.</p> <p><b>NOTE:</b></p> <p>Setting force of the control board should be sufficient to make the gate open and close without stopping, but should stop and</p>	<p>invert with a little effort from a person. In case of safety systems failure, the gate shall never cause physical damaged to obstacles (vehicles, people, etc.).</p>	