




**BOSCH**

Invented for life


# LSN 0300 A LSN improved Module 300 mA

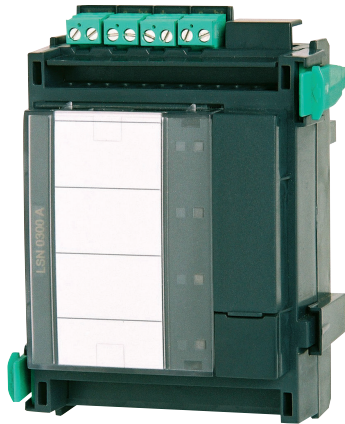

- ▶ Up to 254 LSN improved elements
- ▶ Line length up to 1600 m, depending on configuration and cable type
- ▶ Unshielded cable can be used
- ▶ Line current up to 300 mA, depending on configuration and cable type
- ▶ Additional voltage output (ERT-capable)
- ▶ Flexible network structures (loop, stub, and T-tap)
- ▶ Addressing techniques: LSN improved auto-addressing, LSN classic auto-addressing and manual address assignment

This module allows the connection of an LSN loop with up to 254 LSN improved elements or 127 classic LSN elements, with a maximum line current of 300 mA.

**System Overview**

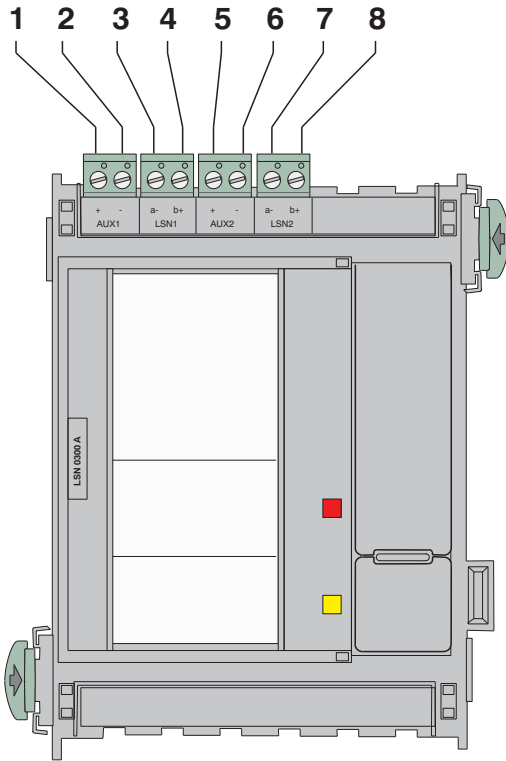

Ite	Description	Connection	
1/2	AUX1 + / -	Auxiliary power supply	Auxiliary power supply stub 1
3	LSN a1-	LSN a1- outgoing	Stub 1 LSN a1-
4	LSN b1+	LSN b1+ outgoing	Stub 1 LSN b1+
5/6	AUX2 + / -	Auxiliary power supply***	Auxiliary power supply stub 2
7	LSN a2-	LSN a2- incoming	Stub 2 LSN a1-
8	LSN b2+	LSN b2+ incoming	Stub 2 LSN b1+

\*\*\* Auxiliary power must only be returned to AUX2 in looped isolators (ERT systems). [Suitable isolators include YBO-R/SCI isolators]

**Installation/Configuration Notes**

**Note** Current consumption of the connected devices and cable length can be calculated with the Fire System Designer (FSD).

- Country-specific standards and guidelines must be considered during planning.

- For operation of the fire detection system according to EN 54-13, it is necessary to terminate every stub and T-tap with EOL-modules.

**Parts Included**

Qty.	Components
1	LSN 0300 A LSN improved Module 300 mA

**Technical Specifications**

**Electrical systems**

Input voltage	20 V DC to 30 V DC / 5 V DC ± 5 %
Output voltage:	
• LSN	30 ± 1.0 V DC
• Aux auxiliary power	28 ± 1.0 V DC
Max. current consumption	1750 mA at 24 V DC
Nominal current consumption	
• Module	39 mA at 24 V DC
• LSN	1,7 x current consumption of LSN elements
• AUX	1,2 x Auxiliary power
LSN line current	Max. 300 mA, depending on configuration and cable type
AUX auxiliary power (28 V DC)	Max. 500 mA in an LSN loop (ERT system) or 2 x max. 500 mA in 2 stubs

**Mechanical systems**

Operation/display elements	2 LEDs ( red = alarm, yellow = fault) 1 button (LED test)
Housing material	ABS plastic, (UL94 V-0)
Housing color	Satin finish, anthracite, RAL 7016
Dimensions	Approx. 127 x 96 x 60 mm (5.0 x 3.8 x 2.4 in.)
Weight	Approx. 225 g

**System limits**

Max. line length	1600 m, depending on configuration and cable type
Number of elements	Max. 127 classic LSN elements Max. 254 LSN improved elements

**Environmental conditions**

Permissible operating temperature	-5 °C to 50 °C (23 °F to 122 °F)
Permitted storage temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Permitted relative humidity	95 % , non-condensing
Protection class as per IEC 60529	IP 30

**Ordering Information**

<b>LSN 0300 A LSN improved Module 300 mA</b>	<b>LSN 0300 A</b>
for connecting an LSN loop with up to 254 LSN improved elements or 127 classic LSN elements, with a maximum line current of 300 mA	

**Accessories**

<b>FLM-420-EOL2W-W EOL Module LSN</b>	<b>FLM-420-EOL2W-W</b>
for EN 54-13 compliant termination of LSN stubs or T-taps	

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6258 5511  
Fax: +65 6571 2698  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**