



Data Sheet for Article: HSKP423HA5

F/FTP Cable Cat.6a, 4x2xAWG23/1, 500MHz, LS0H-3, Dca, blue

Drum 500m

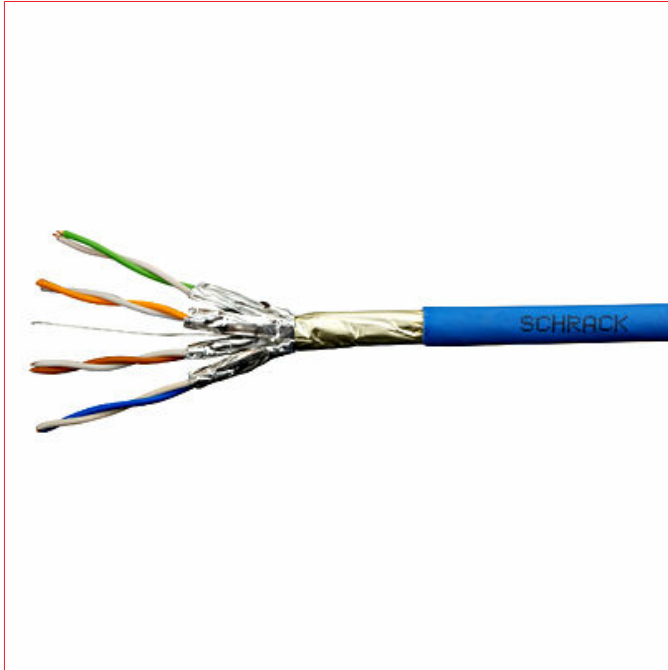

SCHRACK-Info

The F/FTP Cat. 6_A cable is specified up to 500 MHz and provides transmission performance meeting Category 6_A cable specifications EN 50288-10 and Category 6_A specification according to IEC 61156-5 (Ed.2 – 2009) Outstanding system headrooms of the complete cabling system in compliance with ISO/IEC 11801 (2010) and EN 50173. Outstanding performance for the transmission of digital data signals for applications up to 10GbE in compliance with the new Class E_A and IEEE 802.3an standard. These cables are low skew products, i.e. the difference in propagation delay between the individual pairs is very low. This is increasingly being requested for Gigabit Ethernet and 10 Gigabit Ethernet. The suitability of the cable for high-bit-rate transmission systems ensures a high degree of future proofing. Additional features are the slim design and low weight of the cables. Each pair is individually shielded with foil (FTP). The twisted pairs are additionally enclosed with a foil shielding (F/FTP) to provide superior shielding performance. The cable thus exceeds the requirements for EN 55022 Class B emission and EN 55024 immunity, enabling networks to be built which are compliant with the standards on electromagnetic compatibility. The compact design allows the cables to be installed flat or folded together.

CHARACTERISTICS

- Specified up to 500 MHz
- Fulfills the requirements of the standards EN 50288-10 up to 500 MHz, IEC 61156-5 and „Cat. 6 augmented“ in compliance with TIA/EIA 568 and IEC61156-5 (Ed.2 – 2009)
- Outstanding electrical characteristics
- Tinned ground wire centrally running in
- Complete shielding with metal foil
- Low propagation delay and low delay skew between the pairs

- Halogen-free version LS0H-3 to IEC 60332-3-24; IEC 60332-1; IEC 60754-2; IEC 61034



Technical Data

Category	Cat.6A
Cable shielding	F/FTP
Conductor	4 individual shielded pairs
Conductor material	Solid bare copper AWG23/1
Color code pairs	Pair 1 White / Blue Pair 2 White / Orange Pair 3 White / Green Pair 4 White / Brown
Bit rate	10Gbit
Wire insulation	Halogen-free foam/skin material
Drain wire	AWG26/1
Insulation material	Polyethylene (PE)
Shielding	shielded
Pair-Foil	Laminated aluminium polyester, Aluminium facing outside (PiMF)
Overall Shield	Aluminum foil
Cable jacket	LS0H-3
Jacket	LS0H-3: IEC 60332-3-24 IEC 60332-1 IEC 60754-2 IEC 61034
Euroclass acc. to EN50575	Dca
Smoke production	s2
Droplets	d2
Acidity	a1
Fire performance according IEC 60332-1	Yes
Burning load (kJ/m)	570
Outside diameter (mm)	7,2
Net diameter (mm)	7,20
Net weight (kg)	0,05
Weight nominal (kg/km)	48
Colour	Blue
Length/Put-ups	500m - drum
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	60
Temperature range - Operation (°C)	-20 to +60
Temperature range - Installation (°C)	+0 to +50
Bending radii cable - Static (Ø)	3
Bending radii cable - Dynamic (Ø)	7

Technical Data - continued

Max. pulling tension (N)	110
Rated voltage	< 72V DC and < 50V AC
Insulation resistance	> 2000M Ω xkm
Propagation delay (ns/m)	4,2
Mutual capacitance (nF/km)	48
Loop resistance (Ω /km)	< 176 Ω /km
Resistance difference (%)	< 2%
Coupling Resistance	50m Ω /m bei 10MHz
Impedance	at 0.064 MHz: 125 Ω \pm 20% at 1 up to 100 MHz: 100 Ω \pm 15% at 101 up to 250 MHz: 100 Ω \pm 22% at 251 up to 600 MHz: 100 Ω \pm 22%
Longitudinal conversion loss dB/ref.	Length = 100 m: > 46 dB at 64 kHz Length = 100 m: > 40 dB at 1 MHz Length = 100 m: > 20 dB at 100 MHz
Grounding coupling at 0.001 MHz (pF/km)	1000
SKEW (ns/100m)	<20ns/100m
NVP (%)	79

REFERENCE STANDARD: IEC 61156-5

Frequency	1	10	16	20	31,25	62,5	100	250	500	MHz
Attenuation	2,1	5,9	7,5	8,4	10,5	15	19,1	31,1	45,3	dB/100m
NEXT	75,3	60,3	57,2	55,8	52,9	48,4	45,3	39,3	34,8	dB/100m
PS NEXT	72,3	57,3	54,2	52,8	49,9	45,4	42,3	36,3	31,8	dB/100m
ACR-F	68	48	43,9	42	38,1	32,1	28	20	14	dB/100m
PS ACR-F	65	45	40,9	39	35,1	29,1	25	17	11	dB/100m
ACR-N	73,2	54,4	49,8	47,4	42,4	33,4	26,2	8,3	-10,4	dB/100m

TYPICAL VALUES

Frequency	1	10	16	20	31,25	62,5	100	250	500	MHz
Attenuation	1,8	5,3	6,8	7,6	9,6	13,6	17,3	27,7	41,9	dB/100m
NEXT	>100	>100	>100	>100	>100	97	95	90	83	dB/100m
PS NEXT	98	98	98	98	98	95	93	88	81	dB/100m
ACR-F	93	93	93	93	90	86	83	70	57	dB/100m
PS ACR-F	90	90	90	90	87	83	80	67	54	dB/100m
ACR-N	98,2	94,7	93,2	92,4	90,4	83,4	77,7	62,3	41,1	dB/100m

Typical values are for information only.

Article Table

DESCRIPTION	NVP (%)	Order No.
F/FTP Cable Cat.6a, 4x2xAWG23/1, 500MHz, LS0H-3, Dca, blue Drum 500m	79	HSKP423HA5
Optional Accessories		
PERFORMANCE LINE Jack RJ45 shielded, Cat.6a 10GB 4PPoE 100W (SFB)		HSPMRJ6G1A
PERFORMANCE LINE Jack RJ45 shielded, Cat.6a 10GB 4PPoE 100W (SFB), 24 pieces		HSPMRJ6G2A
TOOLLESS LINE Jack RJ45 shielded, Cat.6a 10GB 4PPoE (100W) (SFA)		HSEMRJ6GWA
Cable dispenser for 250kg Load for drums up to 52cm width		HTOOL00006
Back to back cable tie black 16mm x 4m		Q7KB0416-S
Back to back cable tie blue 16mm x 4m		Q7KB0416-B
Back to back cable tie red 16mm x 4m		Q7KB0416-R
Back to back cable tie yellow 16mm x 4m		Q7KB0416-Y
Back to back cable tie green 16mm x 4m		Q7KB0416-U