

Introduction
This device is a WiFi based Touch Key Access Controller & RFID Reader. People can install the mobile APP (TuyaSmart or Smartlife) to easily access the door with their smartphone. The APP supports 500 mobile users, and can manage 1000 users (Fingerprint / PIN / Card) maximum by the APP.

APP Operation
Here are just a few steps to get you started.
1) Free APP Downloading
Search TuyaSmart or Smartlife on Google Play or APP Store
2) Make sure WiFi works on your mobile phone.

1. Register & Login
(Make sure the registered email is legal and valid, so that you can recover your password once forgotten. **Mobile Number is for China Mobile ONLY**)

You will get a verification code in your mail box.

2. Add Device
You can add device by clicking 'Add Device' or clicking '+' on the top. (It is suggested to turn on the Bluetooth, it's easier to find the device and faster to add device.)

Attention: When the user first Open the lock through APP, APP will ask you to Switch on 'remote unlock' first.

3. Member Management
Note: The first to add the device is the Home Owner (Super Master)

	Home Owner (Super Master)	Administrator	Ordinary member
Open the door	√	√	√
Member Management	√	√	X
User Management	√	X	X
Set Users as Admin	√	X	X
View All Records	√	√	X
Set Relay Time	√	√	X

4. User Management
4.1 Add Members
(Note: The members that you shared to must register the account first.)

4.2 Manage Members
Owner (Super Master) can decide effective time (Permanent or Limited) of the members.


4.3 Delete Members

4.4 Add Users (Fingerprint/ PIN / Card Users)
The APP supports to Add/Delete Fingerprint / PIN / Card users.

Remark: When adding members, the Owner (Super Master) can decide to add the user as Admin or Ordinary member.

(Same operation for Ordinary member)

Remark: When deleting members, the Owner (Super Master) can decide to delete the user as Admin or Ordinary member.

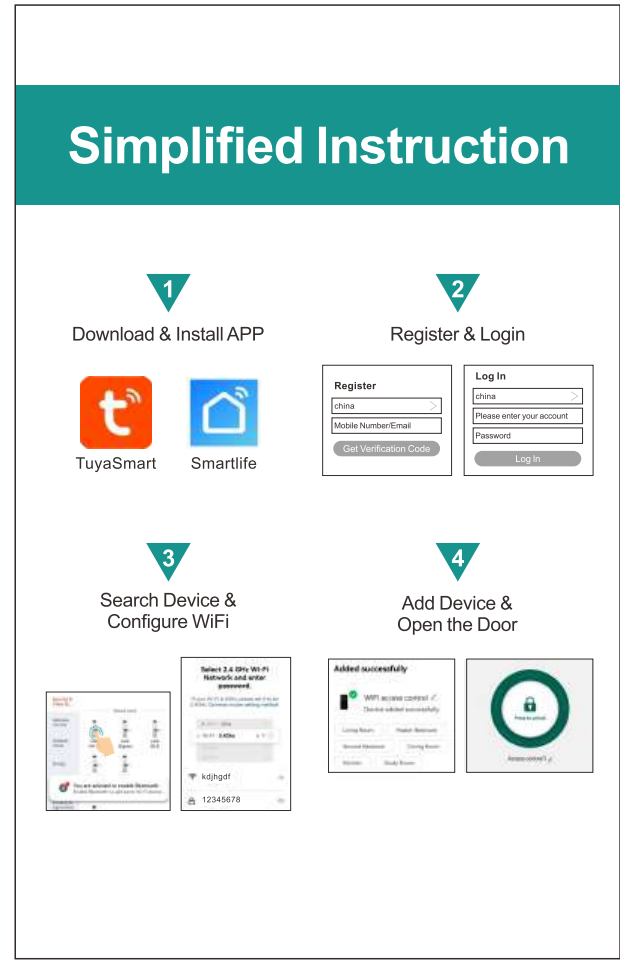

4.5 Delete Users (Fingerprint/ PIN / Card Users)

For adding PIN & Card users, same operation as adding Fingerprint user.

For deleting PIN & Card users, same operation as deleting Fingerprint user.

5. Temporary Code
The temporary code can be shared by SNS tools (Whatsapp, Skype, Wechat...) or email to the guest/users.
For Temporary Code, there are two types of it. **Cyclically**: For example, valid at 9:00am-6:00pm every Monday-Friday during August-October.

Once: One-time code can be valid in 6 hours and can be used only for once.

5.1 Edit Temporary Code

The temporary code can be also deleted, edited or renamed in the valid period.

6. Setting

6.1 Remote unlock setting
Default is off. When added the device first time, it will ask to turn on. Once turn off, all the mobile users will not be able to access the lock by APP.

6.2 Automatic Lock
Default is on. Automatic Lock on: Pulse Mode. Automatic Lock off: Latch Mode.

6.3 Auto lock time
Default is 5 seconds. It can be set from 0-100 seconds.

6.4 Alarm time
Default is 3 minutes. It can be set from 1-3 minutes.

6.5 Key Volume
It can set Key Volume Mute, Low, Middle and High.

7. Log (Including Open History and Alarms)

8. Remove Device & Reset Bluetooth Binding

Note:
Disconnect is just removing the device from the APP. The users (card / fingerprint code) are still retained. (If Super Master Disconnect, all other members will have no access to the device)
Disconnect and wipe data is unbinding the device and reset Bluetooth. (Means this device can be connected by other new users)
Method 2 to reset the Bluetooth * (Master Code) # - Default Master Code is 123456 9 (Master Code) #
(To change the Master Code, please refer to another user manual)