

PFI-A435 Thermal Monocular Camera



Key Features

- Vanadium oxide uncooled focal plane detector.
- Ultra-low power consumption.
- Detection distance is up to 1,800 m.
- Connects to the mobile app through Wi-Fi.
- Six color palettes.
- Built-in EMMC (32 GB).
- Lightweight and portable.
- IP67 rated.



Technical Specification

Thermal				
Detector Type	Vanadium oxide uncooled focal plane detector			
Effective Pixels	384 (H) × 288 (V)			
Pixel Pitch	12 μm			
Spectral Range	8 μm–14 μm			
Sensitivity (NETD)	≤30 mK@f/1.0			
Frame Rate	50 Hz			
Focal Length	35 mm			
Field of View	H: 7.8°; V: 5.9°			
Focus Control	Manual			
Close Focus Distance	2 m (6.5 ft)			
Aperture	F1.0			
Detection Distance	1,800 m (5,905.51 ft)			
Digital Zoom	1×; 2×; 4×; 8×			
Color Palettes	6 (white hot/black hot/iron red/alarm/emerald/amber)			
Image Display	Image Display			
Display Screen Dimensions	0.41 inch, OLED			
Screen Resolution	1440 (H) × 1080 (V)			
Magnification	3.86×			
Diopter	-4 D to +5 D			
Eye Relief	15 mm (0.59")			
Function				
Storage	Built-in EMMC (32 GB)			
Uniformity Correction	Auto; manual			
Cold/Hot Spot Trace	Yes			
Wi-Fi	Yes			
Analog Output	Yes, type-C.			
Power				
Power Supply	5 VDC/2 A, USB Type-C			
Battery Type	Replaceable and rechargeable 18650 batery			
Battery Capacity	3,200 mAh			
Overvoltage Protection	Yes			
Battery Life	≥7.5 h			
Environment				
Operating Temperature	-30 °C to +50 °C (-22 °F to +122 °F)			




Operating Humidity	≤95%			
Storage Temperature	-30 °C to +65 °C (-22 °F to +149 °F)			
Physical Characteristics				
Protection	IP67			
Structure				
Product Dimensions	151.7 mm × 42.0 mm × 74.4 mm (5.98" × 1.65" × 2.93") (L × W × H)			
Packaging Dimensions	227 mm × 150 mm × 132 mm (8.93" × 5.90" × 5.19") (L × W × H)			
Net Weight	≤318 g (0.70 lb) (battery excluded)			
Gross Weight	≤1,400 g (3.08 lb)			

Ordering Information


Туре	Model	Description
Thermal Monocular Camera	PFI-A435	Thermal Monocular Camera


Installation

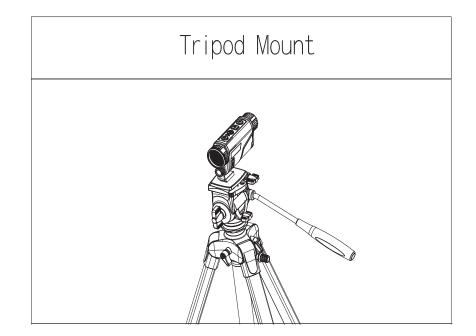



Dimensions (mm[inch])

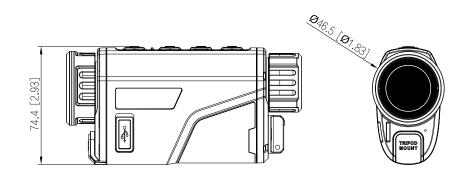

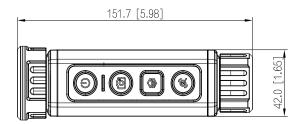

Rev 001.000 © 2023 Pixfra. All rights reserved. Design and specifications are subject to change without notice. The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.

www.pixfra.com