

ZK-SC800-1-W-B

Access and time & attendance control

IP65 IK04

EM card and PIN

50.000 cards | 200.000 records


2.4" TFT | TCP/IP, WiFi, RS485 and

Wiegand

Soft. Access: ZKBioAccess | ZKBioCV

Soft. Attendance: ZKBioTime8 |

GoTimeCloud

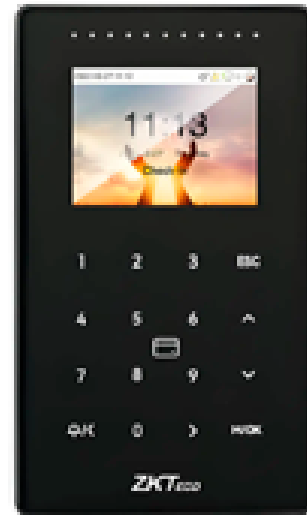

ZKTeco

Stand-alone access control and time & attendance reader

Identification via EM card, keycode and/or combinations

Display 2.4" TFT color display

Capacity 50.000 cards/passwords and 200.000 records

TCP/IP and WiFi communication

Integrated controller (door sensor, push button and relay)

Suitable for exterior IP65

Anti-vandal IK04

Compatible with ZKBioTime 8 software for presence and access management

Compatible with ZKBioAccess IVS software for access control management

Compatible with ZKBio project software CVSecurity

Compatible with GoTime Cloud software for time and attendance management in the cloud

Specifications

Brand	ZKTeco
Model	ACO-SC800-1-W-B
CPU	1GHz Dual Core CPU, DDR2 64M, Flash 256M
Capacity	Up to 50.000 cards/passwords
Records	200.000 registers
Identification modes	RFID card, PIN and/or combinations
Proximity card	EM 125 kHz
Screen	2.4" Color TFT
Communication	TCP/IP, WiFi, RS485 and Wiegand
Integrated controller	Door sensor, push button, relay, Wiegand IN/OUT, alarm input and alarm output
Software	Access Software: ZKBioAccess IVS ZKBioCVSecurity Time and Attendance Software: ZKBioTime 8.0 GoTime Cloud
Power	DC 12 V / 3 A max.
Degree of protection	EXTERIOR IP65 Anti-vandal IK04
Temp. operation	-10° C ~ +55° C
Dimensions	85 (W) x 143 (H) x 20 (D) mm
Weight	600 g