



# DoorProtect

## Wireless magnetic opening detector

### Maximum Performance

- Communicates at a distance of up to 1,200 m from the hub
- Delivers an alarm signal within 0.15 s
- Operates up to 7 years on the pre-installed battery
- Features an external contact for connecting third-party NC detectors

### Effortless Operation

- Includes magnets of various sizes for installation on any window and door frames
- Two-way communication with the hub for testing and configuring

### Simple Installation



Use the QR code to connect the device to the hub



Use the SmartBracket to mount the device without disassembling it



Open the app to test connection quality and configure device settings

### Bulletproof Protection



Tampering alarm




Data encryption



Device forgery prevention

# DoorProtect Plus

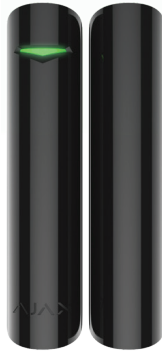

- Features a built-in accelerometer
- Reacts to inclination angle change, vibration, and impact
- Enables to arm the system even when windows are tilt open for ventilation
- Compatible with third-party roller shutter wired motion detectors

## Tech Specs

- Color: white/black
- Installation: indoors
- Radio communication range: up to 1,200 m
- Compatibility: all hubs & ReX
- Sensing element: reed switch
- Activation thresholds:  
Small magnet – 1 cm  
Big magnet – 2 cm
- Temperature sensor: available
- Battery: CR123A, pre-installed
- Battery life  
DoorProtect: up to 7 years  
DoorProtect Plus: up to 5 years
- Protection class: IP50
- Operating temperature range: from +5°C to +40°C
- Permissible humidity: up to 75%
- Dimensions:  
Diameter – 20 mm  
Height – 90 mm
- Weight: 30 g

