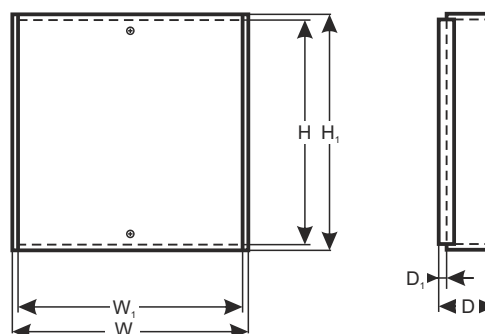


CODE: **AWO278** v1.0/IINAME: **Enclosure 17/TRP80/PAR/SP/GRADE 3**

## APPLICATION

### 7Ah:

1) (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, HD, MG5000, 5050, PS17, ACM12) + 4x ZX8 ( 6xZX4, APR3-ADM2, APR3- HUB2, PGM4)

### 17Ah:

1) (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, HD, MG5000, 5050, PS17, ACM12) + 2x ZX8 ( 5x ZX4, APR3-ADM2, HUB, PGM4)

## TECHNICAL PARAMETERS

<b>External dimensions of the enclosure:</b>	W=340, H=400, D=130 D <sub>1</sub> =15 [+/- 2mm]
<b>External dimensions of the front panel:</b>	W <sub>1</sub> =335, H <sub>1</sub> =405 [+/- 2mm]
<b>Weight net/gross:</b>	5,42kg / 5,71kg [+/-0,1kg]
<b>Battery space:</b>	17Ah/12V Sealed Lead Acid (SLA)
<b>Transformer</b>	TRP 80VA/16V/18V/20V in the case of PC/ABS in class UL94- V0, IP20
<b>Power supply:</b>	230V/AC (-15%/+10%), 50Hz, 400mA (max.)
<b>Power supply output:</b>	U1=16V/AC or U2=18V/AC or U3=20V/AC(-5%, +15%), I1=5,0A or I2=4,5A or I3=4,0A (max)
<b>Operating environment:</b>	2nd environmental class, -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 1,0mm, corrosion protection, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	2 x microswitch: opening of the enclosure, 0,5A@50V/DC max. NC/NO - normally closed contacts / normally open
<b>Closing:</b>	screwed x 2
<b>Notes:</b>	distance from wall (mounting surface) - 15mm, "C"-shaped doors and the bottom of the casing, no hinges
<b>Declaration, warranty:</b>	CE, RoHS in accordance with the EN50131 standard, Grade 3 2 year from the production date