
©Enhanced Model

MX-40PT

The MX-40PT, the enhanced MX-40QZ model, has a pet tolerance function and tamper switch.

ODETECTION AREA

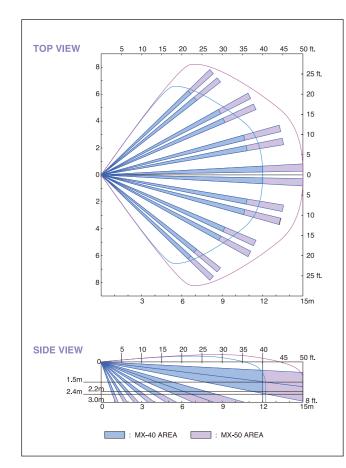

OPTIONAL BRACKETS

FA-3

Compact Wall & Ceiling Mount Bracket Adjustable ±45° Horizontally

0-10° Vertically Downwards



*Specifications and design are subject to change without prior notice.


NOTE: This unit is designed to detect movement of an intruder and activate an alarm control panel. Being only a part of a complete system, we cannot accept responsibility for any damages or other consequences resulting from an intrusion. This product conforms to the EMC Directive 89/336 EEC.



OSPECIFICATIONS

| MODEL | MX-40QZ/PT | MX-50QZ |
|-----------------------|---|------------------------------------|
| Detection method | Passive Infrared and Microwave | |
| Coverage | 12m x 12m (40ft. x 40ft.) 85° wide | 15m x 15m (50ft. x 50ft.) 85° wide |
| Detection zones | 78 zones (PIR) | |
| Mounting height | 1.5 - 2.4m (5 - 8ft.) | 2.2 - 3.0m (7.5 - 10ft.) |
| Sensitivity | 2° C (3.6° F) at 0.6m/sec. (2ft./sec.) | |
| Detectable speed | 0.3 - 1.5m/sec. (1 - 5ft./sec.) | |
| LED alarm indicator | Alarm condition | |
| Alarm period | Approx. 2.5 sec. | |
| Alarm output | N.C., 28V DC== 0.2A max. | |
| Tamper switch | N.C., Open when cover is removed (N.C., 28V DC== 0.1A max.) | |
| Pulse count | Approx. 20 sec. 2 or 4 | |
| Warm up period | Approx. 1 min. | |
| Power supply | 9.5 - 16V DC= | |
| Current consumption | 18mA (max.) at 12V DC | 20mA (max.) at 12V DC= |
| Weight | 110g (3.9oz.) | |
| Operating temperature | -10° C - +55° C (14° F - 131° F) | |
| Operating humidity | 95% max. | |
| Microwave frequency | 2.45GHz (FCC, IC, ETS300-440 approval) | |
| RF interference | No Alarm 20V/m | |
| | | |

ODIMENSIONS

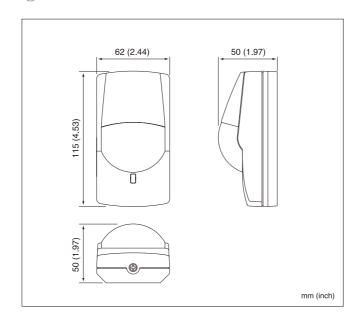



OPTEX CO., LTD. (ISO 9001 Certified by LRQA / ISO14001 Certified by JET) 5-8-12 Ogoto, Otsu, Shiga, 520-0101 Japan TEL +81(0)77 579 8670 FAX +81(0)77 579 8190 http://www.optex.co.jp/e

OPTEX INCORPORATED (USA)

http://www.optexamerica.com OPTEX (EUROPE) LTD. (UK) (ISO9001 Certified by NQA)

OPTEX SECURITY SAS (FRANCE) http://www.optex-security.com OPTEX KOREA CO., LTD. (KOREA) http://www.optexkorea.com OPTEX SECURITY Sp. z o.o. (POLAND) http://www.optex.com.pl

OPTEX (DONGGUAN) CO., LTD. Shenzhen office (CHINA) http://www.optexchina.com This catalogue uses paper from reforested wood in consideration of the environment. No. 75063-05-909-0807




PASSIVE INFRARED & MICROWAVE COMBINATION DETECTOR

MX-40/50



Optex Now Provides Unprecedented Reliability in Detection Performance by **Integrating New Microwave** Technology and Our Stateof-the-Art PIR Technology


High-Grade Sensing Performance from a Combination of Microwave and PIR Technology. Easy Installation and Compact, Attractive Design - The MX-40/50 Totally Satisfies Your Detection Needs

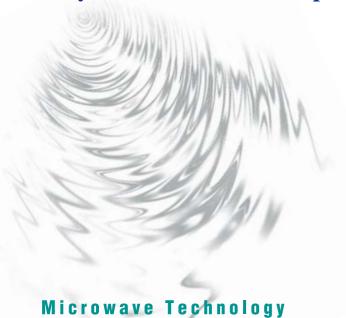

Anti-Crosstalk System

Because Optex's unique microwave technology allows the design of antenna settings differently from conventional methods, the Anti-Crosstalk System of the MX-40/50 prevents interference from other microwaves. When several detectors are placed in combination in one area, false alarms may occur due to matching frequencies, because microwaves from each detector may cause interference with each other. But the MX-40/50 greatly reduces interference to prevent false alarms. And if noise does enter the antenna and causes microwave interference, the Noise Reduction Circuit of the MX-40/50 cancels out these noises to prevent unwanted alarms.

The high-quality, highly-reliable MX-40/50 solves an undeniable problem for the combination sensors — the false alarms caused by interference from other microwaves.




OPTEX Design and Modern Technology

Quick and Easy Installation with Unique Compact Housing

Easy installation and wiring are engineered into this compact housing.

Easy Microwave Area Adjustment: • Long or Short Distance Selector Switch Cover Lens

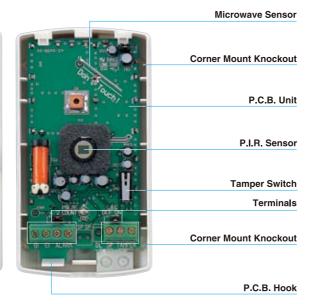

Improved Performance with Reliability from Microwave and Passive Infrared Integration

Optex Design and Innovation Provide High Reliability using Combination Technology

1 High Reliability

LED Indicator


Ideal Detection Area

The MX-40/50 creates an integrated detection area. This enables the microwave detection area to synchronise to the PIR detection area, achieving higher detection performance and preventing errors and false alarms.

Spherical Lens Design


With uniform distance between each lens segment and the pyroelectric elements. the spherical lens provides a precise focal length to each of the multiple lens segments. This enables each lens segment to precisely face its detection area

and creates detection zones without distortion, achieving a new level in lens design precision. Spherical design also makes lens construction tough against outside forces and highly resistant to damage from disturbances to the lens.



Easy Wiring Knockouts


The PC board is removable for simple wiring, and just by using screwdriver, a firm tap will easily remove the knockout



LONG

Noise Reduction Function

The Noise Reduction Circuit provides high-reliability performance against outside noise, such as electromagnetic interference and especially noise from fluorescent lights. False alarms are thus greatly reduced.



Easy Installation

Easy Microwave Range Selector

The MX-40/50 allows simple two-step adjustment. Setting the range selector to short or long-range detection sensitivity according to the room size, makes adjustment during installation much easier and less time-consumina



3 Compact, Stylish Design

Compact and stylish body matches any interior design without disturbing the

Passive Infrared Technology

Quad Zone Logic (Patent Listed)

The highly accurate and reliable detection pattern will maintain its sensitivity through the entire detection area, even in high temperature or low contrast environments. Quad Zone Logic creates an extremely high vertical zone density, two or three times the size of conventional PIRs. These taller zones capture the entire body mass and enable detection of even the smallest temperature contrast against the background. In addition, the vertical detection density has been improved to take into

account dead zones created by furniture or partitions.

