

# NFC-3013

Eticheta NFC autoadeziva, rotunda, cu cip NXP NTAG213

## Imagine



## Descriere

Eticheta NFC autoadeziva, rotunda, cu cip Cip NXP NTAG213 reinspectibil, frecventa de functionare 13.56 MHz.


## Caracteristici

- Eticheta NFC autoadeziva
- Cip NXP MIFARE Ultralight (Ultralight C) - NTAG213, read/write
- Cip reinspectibil**
- Format Wiegand 34
- Protocol anti-coliziune
- Protectie la scriere (parola)
- Parole pe 32 biti
- UID ASCII mirrors
- Contoare de 24 biti

## Specificatii

- |                                 |                                     |
|---------------------------------|-------------------------------------|
| •Frecventa de operare:          | 13.56 MHz                           |
| •Viteza de transfer:            | 106 kbit/s                          |
| •Distanța de citire:            | <100 mm (depinde de cititor)        |
| •Serial number:                 | 7 biti                              |
| •Capacitor:                     | 50 pF                               |
| •Memorie:                       | 180 biti organizata in 45 de pagini |
| •Memorie pentru scriere/citire: | 137 biti                            |
| •Retinere date:                 | 10 ani                              |
| •Material:                      | PVC                                 |
| •Forma:                         | Rotunda                             |
| •Temperatura de operare:        | -40 ~ +85 °C                        |
| •Culoare:                       | Rosu, negru                         |
| •Dimensiuni:                    | 30(Ø) x 1(H) mm                     |
| •Greutate:                      | 0.1 g                               |

## Aplicatie

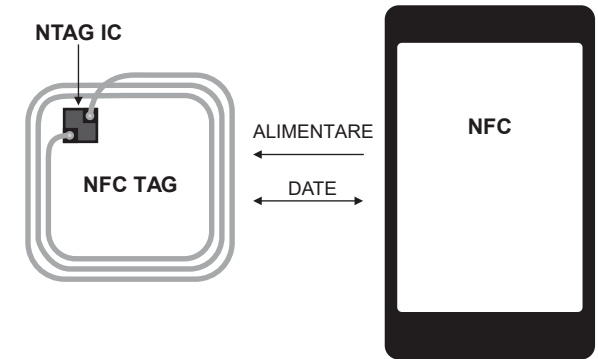

## Observatii



EEE FAC OBIECTUL UNEI  
COLECTARI SEPARATE

