D-Link®
Building Networks for People

DUB-M420
4-in-1 USB-C Hub with HDMI and Power Delivery

Features

HDMI Compatibility
- Ultra HD video resolution up to 4K @ 30HZ
- Supports HDMI 1.4 and DisplayPort Alternate Mode over USB-C
- HDCP 2.2 compatible

USB Type-C with Simple Installation
- Two USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 Type-C port with data sync and power delivery of up to 20 V @ 3 A
- Backwards compatible with USB 2.0 and USB 1.1 devices
- Simply plug it in and you're ready to go
- No additional hardware or software installation required

The DUB-M420 4-in-1 USB-C Hub with HDMI and Power Delivery allows you to instantly add a second display, two additional USB 3.0 ports, as well as one additional USB Type-C port to your ultraportable laptop or personal computer. Just plug the DUB-M420 into an available USB Type-C port and you're ready to connect to your TV or monitor in full resolution with the reliability of a wired video connection. You can also connect up to 2 more USB devices, as well as sync and charge one USB Type-C device, meaning that you don't have to give up that USB Type-C port this hub is connected to.
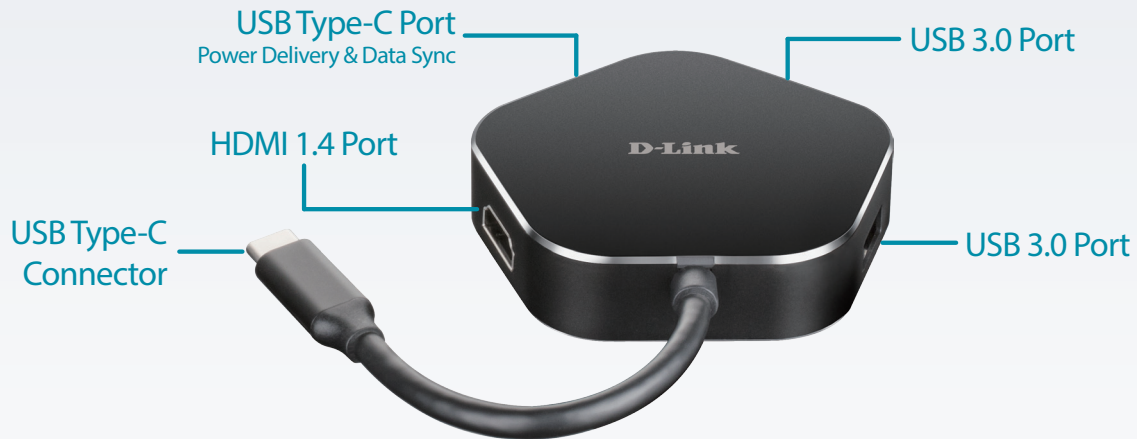
Fully-Featured HDMI Video Connectivity

The DUB-M420 4-in-1 USB-C Hub with HDMI and Power Delivery plugs into any available USB Type-C or Thunderbolt 3 port on your computer and enables you to connect to a HDMI display with a resolution of up to 4K at 30 frames per second.

Easy to Use

The DUB-M420 connects to your computer's USB Type-C port and is ready to run as soon as it's plugged in. The plug-and-play design ensures that there is no need to change any configuration settings or install any additional software for your computer. For extra convenience, the adapter's compact design means that you can easily slip the DUB-M420 into your pocket or laptop bag and take it with you.

4-in-1 USB-C Hub with HDMI and Power Delivery

Hardware Overview

USB Type-C Port
Power Delivery & Data Sync

USB 3.0 Port

HDMI 1.4 Port

USB Type-C
Connector

USB 3.0 Port

D-Link

Technical Specifications		
Connectivity		
Device Interfaces	• Two USB 3.0 Type-A (female) ports • HDMI Port (3840 x 2160 or 4096 x 2160 pixels @ 30 HZ) backwards compatible to 1080p and 720p	• USB 3.0 Type-C (female) port • USB Type-C (male) connector compliant with the Thunderbolt 3 Port
Standards	• HDMI 1.4 • HDCP 2.2 • DisplayPort Alternate Mode	• USB Specification Version 3.0 • USB Specification Version 2.0 • USB Specification Version 1.1
General		
Minimum System Requirements	• Computer running Microsoft Windows® OS, Mac OS®, or Chrome OS™	• A USB Type-C Port with DisplayPort Alternate Mode support
Power Delivery	• USB Type-C port: 20 V @ 3 A	
Physical		
Dimensions (W x H x D)	• 68 x 67 x 16 mm (2.68 x 2.64 x 0.63 in)	• Cable length: 11.5 cm (4.53 in)
Weight	• 50.0 g (1.76 oz)	
Power	• Input: Bus-powered	• Consumption: 31 mA, 5 V DC

Temperature	• Operating: 0 to 70 ℃ (32 to 158 ℉)	• Storage: -25 to 85 ℃ (-13 to 185 ℉)
Humidity	• Operating: 5% to 80% RH, non-condensing	• Storage: 5% to 80% RH, non-condensing
Certifications	• CE • IC	• FCC • RCM

Order Information

Part Number	Description
DUB-M420	4-in-1 USB-C Hub with HDMI and Power Delivery

Updated March 8, 2019

D-Link®
Building Networks for People