

Product Highlights

True Gigabit Speed

Enjoy lightning-fast Gigabit speeds without the need for installing a new network card simply by using any available USB Type-C port on your device

Full Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution for stunning videos and images with no lag

Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer files up to 10 times faster than with USB 2.0

Dual-Slot SD Card Reader

Dual-slot SD card reader is compatible with both SD and microSD cards



DUB-M810

8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power Delivery

Features

Gigabit Ethernet Connectivity

- Achieve transfer speeds of up to 1 Gbps
- Status LEDs for connection status and data transfer speed
- Auto 10/100/1000 Mbps speed detection to always use the highest available speed

High Fidelity Video Compatibility

- Ultra HD video resolution up to 4K @ 30 Hz
- Supports HDMI 1.4 and DisplayPort Alternate Mode over USB-C
- HDCP 2.2 compatible

SD Card Compatibility

- SD card & microSD card
- SD, SDHC, SDXC (UHS-I mode)

Versatile and Convenient

- Three USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 Type-C port with data sync and power delivery of up to 100 W (20 V @ 5 A)
- One USB 3.0 port supports Quick Charge BC1.2
- · Simply plug-and-play, no software required

The DUB-M810 8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power Delivery allows you to instantly add a second display, a SD card reader, a Gigabit Ethernet port, three additional USB 3.0 ports, with one that can fast-charge, as well as a USB Type-C port with charging ability to your ultra-portable computer. Just plug the DUB-M810 into an available USB Type-C port and you're ready to send content to your TV or monitor in full resolution with the reliability of a wired video connection. You can also connect up to 3 more USB devices, as well as insert a microSD or regular SD card, giving you direct access to your full resolution photos stored on memory cards from your cameras. You can also sync and charge one USB Type-C device, meaning that you don't have to give up that USB Type-C port this hub is connected to.

Fully-Featured HDMI Video Connectivity

The DUB-M810 8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power Delivery plugs into any available USB Type-C or Thunderbolt 3 port on your computer and enables you to connect to a HDMI display with a resolution of up to 4K at 30 frames per second.

Gigabit Ethernet Connectivity

The DUB-M810 plugs into any available USB Type-C port on your computer to enable you to connect to an Ethernet network at speeds of up to 1 Gbps. High-speed Gigabit Ethernet allows you to transfer large files in no time, or make light work of backups to a server or network storage device. Where wireless connectivity is inconsistent or unavailable, this adapter offers a seamless wired alternative.

Easy to Use


The DUB-M810 connects to your computer's USB Type-C port and is ready to run as soon as it's plugged in. The plug-and-play design ensures that there is no need to change any configuration settings or install any additional software for your computer. For extra convenience, the adapter's compact design means that you can easily slip the DUB-M810 into your pocket or laptop bag and take it with you.



8-in-1 USB-C Hub with

HDMI/Ethernet/Card Reader/Power Delivery

Hardware Overview

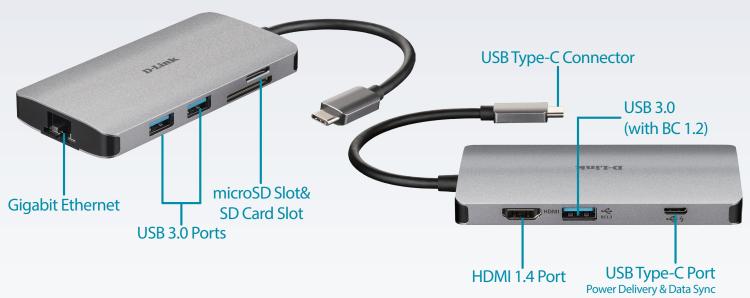

		<u> </u>	
Technical Specifications			
Connectivity			
Device Interfaces	 HDMI port (3840 x 2160 or 4096 x 2160 pixels @ 30 Hz) microSD and SD card slots Three USB 3.0 Type-A ports (One port support BC1.2) RJ-45 Gigabit Ethernet port (10/100/1000 Mbps) 	 One USB 3.0 Type-C port with data sync and power delivery of up to 100 W (20 V @ 5 A) USB Type-C connector (Thunderbolt 3 compliant) 	
Standards	 USB Specification Version 3.0 USB Specification Version 2.0 USB Specification Version 1.1 Quick Charge BC 1.2 SD, SDHC, SDXC (UHS-I mode) HDMI 1.4 HDCP 2.2 	 DisplayPort Alternate Mode OHCI (Open Host Controller Interface) EHCI (Enhanced Host Controller Interface) IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x flow control 	
General			
Minimum System Requirements	Computer running Microsoft Windows® OS, Mac OS®, or Chrome OS™	A USB Type-C port with DisplayPort Alternate Mode support	
Physical			
Dimensions (W x H x D)	• 105 x 52 x 13 mm (4.13 x 2.05 x 0.51 in)	• Cable length: 15 cm (5.91 in)	
Weight	• 82.0 g (2.90 oz)		
Power	Input: Bus-powered	• Consumption: 80 mA, 5 V DC	
Temperature	• Operating: 0 to 45 °C (32 to 113 °F)	• Storage: -10 to 70 °C (14 to 158 °F)	
Humidity	Operating: 10% to 85% RH, non-condensing	Storage: 5% to 90% RH, non-condensing	
Certifications	• CE • IC	• FCC • RCM	
Order Information			
Part Number	Description		
DUB-M810	8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power	8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power Delivery	



