
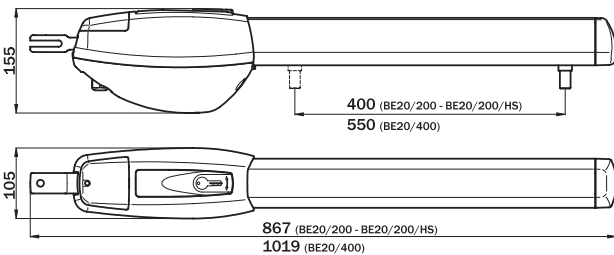



BE20 Brushless

BRUSH
LESS


24 Vdc

36 Vdc



BE20		BE/200	BE/200 HS	BE20/400
Alimentare	V	230 VAC - 50 Hz	230 VAC - 50 Hz	230 VAC - 50 Hz
Alimentare motor	V	24V	36V	36V
Putere consumata	W	200	200	200
Utilizare		Intensiva	Intensiva	Intensiva
Forta max.	N	100 - 2200	100 - 2200	100 - 2800
Cursa	mm	400	400	550
Timp de deschidere 90°	s	15-25	10-15	17-26
Ciclu de utilizare	%	100	100	100
Temperatura de lucru	°C	-20+55	-20+55	-20+55
Clasa de protectie	IP	43	43	43
Viteza	cm/s	1,66	3	1,66
Limitator capat cursa		mecanic	mecanic	mecanic
Dimensiune max. pe canat	m	2,5	2,5	4
Unitate de comanda		B70/2DC	EDGE1	EDGE1

KIT	Motor	Unitate de comanda B70/2DC	Telecomanda E80/TX52R/2	Receptor Radio H93/RX22A/I	Lampa Semnalizare R92/LED 230	Fotocelule de Protectie R90/F4ES	Porti batante in 2 canate de max. (m)
-----	-------	----------------------------	-------------------------	----------------------------	-------------------------------	----------------------------------	---------------------------------------



BE20 / 210	2x BE20/200	1x	2x	1x	1x	2x	2.5 m
BE20 / 211HS	2x BE20 / 211HS	1x	2x	1x	1x	2x	2.5 m
BE20 / 410	2x BE20 / 410	1x	2x	1x	1x	2x	4 m

