

HPW2P1

Network WDR 2MP Pinhole Camera



OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive scan
IMAGE SENSOR	1/2.7" 2 Megapixel progressive scan CMOS
NUMBER OF PIXELS (H x V)	1920(H) x 1080(V)
MINIMUM ILLUMINATION	0.082lux/F2.4(Color,30IRE) 0.18Lux/F2.4(B/W,30IRE)
S/N RATIO	More than 45dB
ELECTRONIC SHUTTER SPEED	1/3~1/100000s
IR DISTANCE	N/A
DAY/NIGHT	Auto(Electronic) / Color / B&W
BACKLIGHT COMPENSATION	BLC/HLC/WDR
WHITE BALANCE	Auto/Natural/Street Lamp/Outdoor/Manual/ Customized Region
GAIN CONTROL	0~100
WIDE DYNAMIC RANGE	120dB
NOISE REDUCTION	3D DNR
PRIVACY MASKING	Off / On (4 Areas, Rectangle)
MOTION DETECTION	Off / On (4 Zones, Rectangle)
REGION OF INTEREST	Off / On (4 Zones)
FACE DETECTION	Supported
AUDIO DETECTION	Supported
LENS	2.8mm, Fixed, F2.4, Board-in
ANGLE OF VIEW	H: 108°, V: 60°
VIDEO	
VIDEO COMPRESSION	H.264/H.264B/H.264H/H.265/Smart Codec/ MJPEG (Sub Stream)
RESOLUTION	1080P(1920x1080)/960P(1280x960) /720P(1280x720)/D1(704x480/576)/ VGA(640x480)/CIF(352x240/288)
FRAME RATE	Main Stream: 1080p (1 ~ 25/30fps) Sub Stream: D1(1 ~ 25/30fps)
BIT RATE CONTROL	CBR/VBR
BIT RATE	H.265: 12K ~ 6400Kbps H.264: 32K ~ 8192Kbps
AUDIO	
COMPRESSION	G.711a/ G.711Mu/ AAC/ G.726
INTERFACE	1/1 channel In/Out

NETWORK	
ETHERNET	RJ-45 (10/100Base-T)
SUPPORTED WEB BROWSERS	Internet Explorer (11.0+)
SUPPORTED OS	Windows® 7 32-bit/64-bit; Windows® 10 32-bit/64-bit
PROTOCOLS*	HTTP; HTTPS; TCP; ARP; RTSP; RTP; RTCP; UDP; SMTP; DHCP; DNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; Bonjour; IEEE 802.1x; Multicast; ICMP; IGMP; TLS
INTEROPERABILITY	ONVIF Profile S/Q
MAXIMUM USERS ACCESS	20 Users
SECURITY	User account and password protection HTTPS, IP Filter, Digest authentication, User access log, TLS1.2 only, AES-128/256, SSH/Telnet closed, sFTP by default, PCIDSS compliance
EVENT	Network disconnection, IP conflict, Illegal access, Voltage Detection
ELECTRICAL	
POWER SUPPLY	DC12V
POWER CONSUMPTION	<1.5W
MECHANICAL	
DIMENSIONS	44.9mm x 57.7mm x 34.35mm (1.77" x 2.27" x 1.35")
PRODUCT WEIGHT	0.10Kg (0.22lb)
PACKAGE WEIGHT	0.17Kg (0.37lb)
CONSTRUCTION	Die-cast aluminum housing with powder coat
CONSTRUCTION COLOR	RAL 9005 (Black)
ENVIRONMENTAL	
OPERATING TEMPERATURE	-30° C ~ +60° C (-22° F ~ +140° F)
RELATIVE HUMIDITY	Less than 95%, non-condensing
INGRESS PROTECTION	N/A
REGULATORY	
EMISSIONS	FCC Part 15B, EN 55032
IMMUNITY	EN 50130-4
SAFETY	UL 60950-1, EN 62368-1
ROHS	EN 50581

* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

Network WDR 2MP Pinhole Camera


RECOMMENDED ACCESSORIES

SYSTEM COMPATIBILITY	
HEN*4	8/16/32/64-channel Performance Series 4K NVRs (H.264 and H.265)
HEN*3	4/8/16/32-channel Performance Series 4K NVRs (H.264 and H.265)
HEN*2	4/8/16-channel Performance Series NVRs (H.264)

ORDERING

HPW2P1	Network WDR 2MP Pinhole Camera, 1/2.7" CMOS, 2.8mm Fixed, 12VDC, H.265/H.264/Smart Codec
--------	--

DIMENSIONS

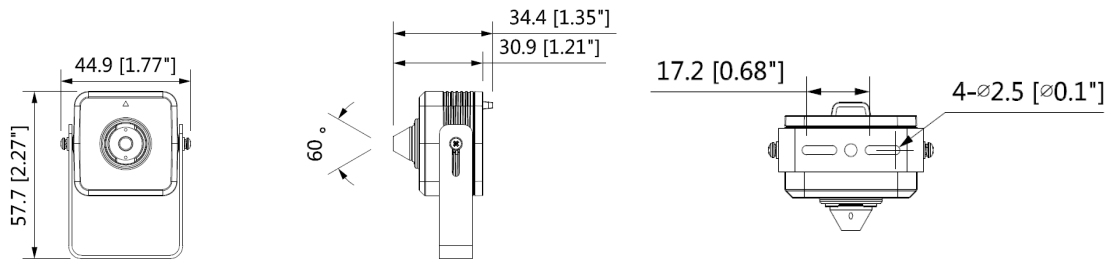

For more information

www.honeywellvideo.com

Honeywell Security

2700 Blankenbaker Pkwy, Suite 150

Louisville, KY 40299

1.800.323.4576

www.honeywell.com

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

HSV-HPW2P1-01-US(1118)DS-Y
© 2018 Honeywell International Inc.

Honeywell