


YBN-R/6M

Marine Approved Conventional Mounting Base

Features

- ▶ Integral remote indicator output
- ▶ Low Profile, only 8 mm
- ▶ Rugged design
- ▶ Electronics free
- ▶ Quick connections via square cable clamps
- ▶ Accepts 2.5 mm² cables
- ▶ Bayonet slot, low insertion force for detectors
- ▶ Approved to MED by GL

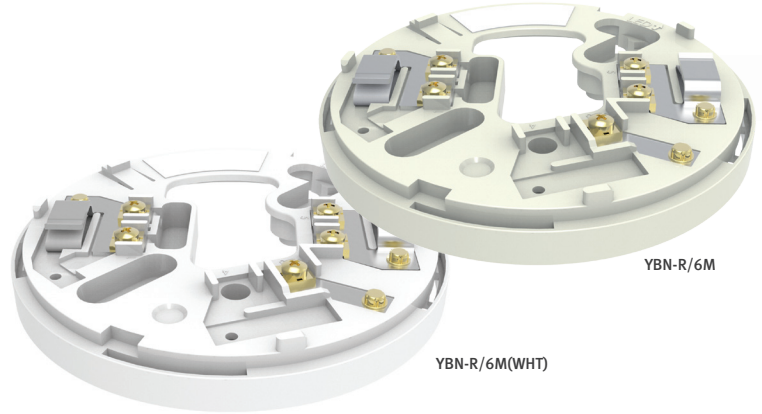

Description

Model YBN-R/6M is a Conventional Detector Mounting Base approved for marine applications by GL (Germanischer Lloyd) and is associated with the CDX Range of Marine Approved Detectors.

It is supplied with square cable clamps for secure and reliable cable termination but the base does not provide line continuity during detector removal, therefore if Call Points are being used then these should be wired onto the zone first. The integrated third terminal provides remote indicator output.

Specification (add details below)

Maximum Humidity	95%RH - Non Condensing (at 40°C)
Colour / Material	Ivory or White / ABS
Diameter (mm) / Height (mm)	100/8
Fixing Centres (mm)	48 ~ 74
Maximum Wire Thickness	2.5 mm ² Cables

Ordering Codes

Product

Marine Approved Conventional Mounting Base
 Marine Approved Conventional Mounting Base (White)

Part Number

YBN-R/6M
 YBN-R/6M WHT