

# J9776A Datasheet

Get a Quote

## Overview

Aruba 2530 Series Gigabit Ethernet devices are enterprise class, fully managed, Layer 2 edge switches delivering cost effective, reliable, and secure connectivity for business networks. Designed for entry level to midsize enterprise networks, these Gigabit Ethernet switches deliver full Layer 2 capabilities with enhanced access security, traffic prioritization, IPv6 host support, and optional PoE+. The 2530 24G model has 24 x 10/100/1000 ports and four Gigabit SFP ports.

## Quick Spec

Figure 1 shows the appearance of Aruba J9776A.

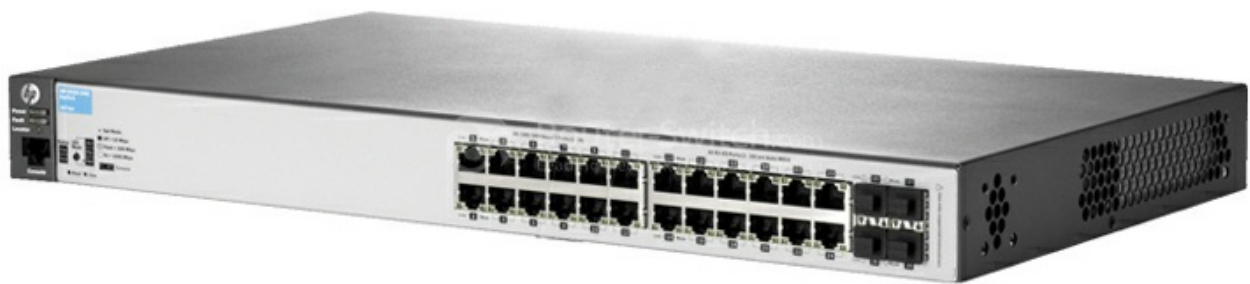


Table 1 shows the quick spec.

<b>Product Code</b>	J9776A
<b>Type</b>	Aruba 2530-24G Switch
<b>Ports</b>	<ul style="list-style-type: none"><li>· 24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only</li><li>· 4 fixed Gigabit Ethernet SFP ports.</li><li>· 1 dual-personality (RJ-45 or USB micro-B) serial console port Supports a maximum of 28 Gigabit Ethernet ports.</li></ul>
<b>Throughput</b>	Up to 41.6 million pps (64-byte packets)
<b>Switching capacity</b>	56 Gb/s
<b>Dimensions (W x D x H)</b>	44.3 x 25.4 x 4.45 cm (17.44 x 10.00 x 1.75 in) (1U height)
<b>Weight</b>	2.77 kg (6.1 lb)

## Product Details

Figure 2 shows the front panel of Aruba J9776A.



Note:

(1)	Power, Fault, and Locator LEDs
(2)	Console Port
(3)	LED Mode select button and indicator LEDs
(4)	24 × RJ-45 autosensing 10/100/1000 ports
(5)	4 × SFP slots

· There is a AC Power Connector on the back panel.

## Compare to Similar Items

Table 2 shows the comparison.

Product Code	<a href="#">J9783A</a>	J9776A	<a href="#">J9775A</a>	<a href="#">J9773A</a>	<a href="#">J9772A</a>
Type	Aruba 2530-8 Switch	Aruba 2530-24G Switch	Aruba 2530-48G Switch	Aruba 2530-24G-PoE+ Switch	Aruba 2530-48G-PoE+ Switch
PoE power	N/A	N/A	N/A	195 W	382 W
Throughput	up to 4.1 million pps (64-byte packets)	Up to 41.6 million pps (64-byte packets)	Up to 77.3 Mp/s (64-byte packets)	up to 41.6 million pps (64-byte packets)	Up to 77.3 million pps (64-byte packets)
Switching capacity	5.6 Gb/s	56 Gb/s	104 Gb/s	56 Gb/s	104 Gb/s

## Specification

J9776A Specifications	
Type	Aruba 2530-24G Switch
<b>System specifications</b>	

Ports	<ul style="list-style-type: none"> <li>· 24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only</li> <li>· 4 fixed Gigabit Ethernet SFP ports.</li> <li>· 1 dual-personality (RJ-45 or USB micro-B) serial console port Supports a maximum of 28 Gigabit Ethernet ports.</li> </ul>
Memory and processor	Processor: ARM9E @ 800 MHz, 128 MB flash, 256 MB DDR3 DIMM; packet buffer size: 1.5 MB dynamically allocated.
Mounting	Mounts in an EIA-standard 19-inch telco rack or equipment cabinet (rack-mounting kit available); horizontal surface mounting; wall mounting.
Management	IMC - Intelligent Management Center; command-line interface; Web browser; configuration menu; Out-of-band management (serial RS-232C or Micro USB); IEEE 802.3 Ethernet MIB; Repeater MIB; Ethernet Interface MIB.
<b>Performance (IPv6 Ready Certified)</b>	
1000 Mb latency	< 2.3 $\mu$ s (LIFO 64-byte packets)
100 Mb Latency	< 7.4 $\mu$ s (LIFO 64-byte packets)
Throughput	Up to 41.6 million pps (64-byte packets)
Switching capacity	56 Gb/s
MAC address table size	16000 entries
<b>Physical specifications</b>	
Dimensions (W x D x H)	44.3 x 25.4 x 4.45 cm (17.44 x 10.00 x 1.75 in) (1U height)
Weight	2.77 kg (6.1 lb)
<b>Electrical specifications</b>	
Maximum heat dissipation	164 BTU/hr (173.02 kJ/hr)
Voltage	100 - 127 / 200 - 240 V ac
Current	.6/.4 A
Idle power <sup>1</sup>	28.8 W
Maximum power rating <sup>2</sup>	48.0 W
Frequency	50/60 Hz
<p>NOTE: 1: Idle power is the actual power consumption of the device with no ports connected.</p> <p>2: Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p>	
<b>Environmental specifications</b>	
Operating temperature	0° to 45°C (32° to 113°F)
Operating relative humidity	15% to 95% @ 40°C (104°F), noncondensing
Non-operating/storage temperature	-40° to 70°C (-40° to 158°F)
Non-operating/storage relative humidity	15% to 90% @ 65°C (149°F), noncondensing

Altitude	Up to 3 km (10,000 ft)
Acoustic	Power: 26.4 dB, Pressure: 34.0 dB
<b>Safety agency certifications</b>	
Safety	UL 60950-1; CAN/CSA 22.2 No. 60950-1; EN 60825; IEC 60950-1; EN 60950-1
NOTE: IEEE 802.3az applies to Gigabit models only; IEEE 802.3at and IEEE 802.3af apply to PoE+ models only. When using SFPs with this product, SFPs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.	