

# Argus 1200

The power to control

PN: UPLI-LI120AG-CG01B  
EAN: 6422956009458

## Specifications

<b>Capacity</b>	1200 VA / 720 W
<b>Type</b>	Line-interactive
<b>Input</b>	
Nominal Voltage	230 VAC
Accepted Voltage Range	165 - 290 VAC
Frequency Range	50Hz ~ 60 Hz (Auto sensing)
<b>Output</b>	
Nominal Voltage	230 VAC
AC Voltage Regulation (Batt. Mode)	±10%
Frequency Range (Batt. Mode)	50 Hz or 60Hz ± 1 Hz
Power Factor	≥ 0.6 @ nominal voltage (100% load)
Waveform (Batt. Mode)	Pure sine wave
Transfer Time	Typical 4 ms
Overload Protection	Inner firmware protection
<b>AVR</b>	
Type	1 Boost / 1 Buck
<b>Indicators type</b>	
LCD Display	Load level, Battery level, AC mode, Battery mode and Fault indicators
Alarm	Load Capacity, Load & Battery level, AC mode, Battery mode and Fault indicators, etc.
<b>Protection</b>	
Outlets type	4 x IEC C13 Battery Backup & Surge Protection
Full protection	Overload, deep discharge, Overcharge, Over-Voltage, High Temperature, Input spike protection
<b>Environment</b>	
Humidity	0-90 % (non-condensing)
Temperature	0-40°C
Noise level	Less than 50dB



4 x IEC C13 outlets with protection



LCD Display



Pure sine wave output

- Pure sine wave output
- Line-interactive
- Auto restart while AC is recovering
- Auto-Charge
- Boost and buck AVR for voltage stabilization
- Software management
- Off-Mode Charging
- Cold start function
- Emergency power off function (EPO)
- Generator Compatible
- Smart SNMP card supported
- Rack design

## Battery

Battery Type & Number	12V 7.5Ah x 2
Battery Voltage	12V
Typical Recharge Time	6 hours up to 90% capacity
Charging Voltage	13.6 Vdc
Battery Compatibility	PW75123
Running time on battery (minutes)	25% Load - 24 min 50% Load - 11.30 min 75% Load - 6.35 min 100% Load - 3 min

## Management

Connection port	RS232, HID USB, RJ45/RJ11, Intelligent Port (not included in the package)
Software	Online download <a href="http://www.powermonitor.software/">http://www.powermonitor.software/</a>
Software capability	Monitor & Control over USB, LAN and Internet (SNMP card optional)




## Physical

Product dimensions	430 x 438 x 88 mm - 2U
Product weight	14.7 kg
Retail Pack Dimensions	542 x 560 x 218 mm
Retail Pack Weight	15.5 kg



## Running time on battery

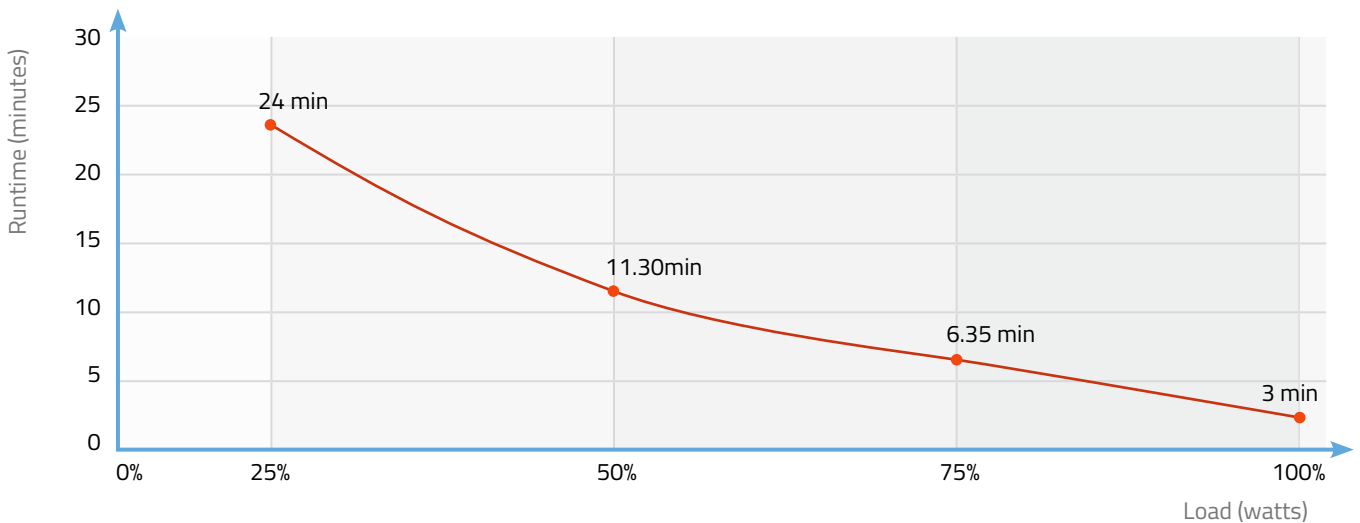

## Logistics

Carton Box Size (LxWxH)	542 x 560 x 218 mm
Pieces in the Carton Box	1
Net & Gross weight / CTN	N.W.: 14.7 kg / G.W.: 15.5 kg



## Certificates

