




2008 CAV-71B World first

"Smart view" series is one of COMMAX products that can satisfy

know-how. Acquisition of 2008 " iF Design award" proves its design is to a world-class.



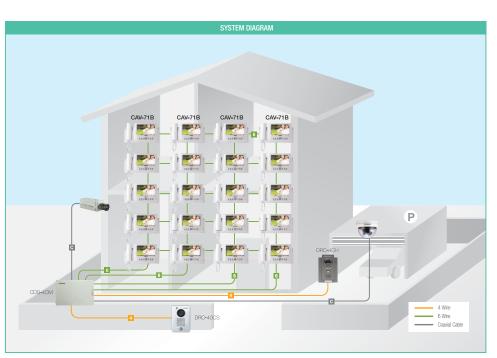

Company Overview

O Specifications

CAV-71B

• Power source : AC 100V-240V, 50/60Hz(Free voltage) / 17W • Display : 7 inch wide TFT LCD · Mounting type : Wall surface mounted type • Wiring : 1)CDS-4CM(Video distributor unit) : 6 wires 2)CAV-71B : 6 wires • Distance : CAV-71B to CAV-71B : 20m(@0.65) Communication : Handset & Hands free On-screen duration : 60 ± 30 sec • Temperature : 0°C ~ +40°C (32°F ~ 104°F) • Image record : 128 cuts • Dimension : 314 x 173 x 44(mm)

CDS-4CM

- Power source : AC 100V-240V . Wiring : 1) Camera unit : 4 wires 2) Master monitor unit : 6 wires 3) Telephone : 2 wires . Distance : To door camera unit : 50m, To master unit : 20m - Dimension : 300 x 200 x 51(mm)

Functions

. Up to 4 cameras(Inter-choice CCTV camera or door camera) and up to 20 monitors are connected through CDS-4CM.

QUINTUS

+7 inch TFT LCD is applied to see a visitor for high resolution quality.

. Reviewing the image of a visitor when being away Intercom function

. Monitoring & talk with a visitor

* Door lock release

. OSD(On screen display) interface

QUINTUS INDUSTRY Co., Ltd. 100 ถนนเสียบคลองมอญ แขวงทับยาว เขตลาดกระบัง กรุงเทพฯ 10520 100 Liab Khlongmon Rd., Tabyao, Ladkrabang, Bangkok 10520

Tel : (66) 2737 4884 Fax : (66) 2737 4819 www.quintusindustry.com



Recommended Products

CAV-71B

Monitors

Door cameras

-... ۲ DRC-40CS DRC-4CAN DRC-41CSN DBC-400

CONNECTING DIAGRAM

.....

1 e

CAV-72B

Ċ

New Products