IP-COM

Quick Installation Guide

Get to Know the Devices

- LED Indication



Indicator	Status	Description
Ethernet	Solid green	Connected to a 1000 Mbps Ethernet device.
	Blinking green	Data is being transmitted or received.
	Off	No device is connected to this port.
Uplink	Solid green	Connected to a 1000 Mbps Ethernet device.
	Blinking green	Data is being transmitted or received.
	Off	No device is connected to this port.
Wireless	Solid green	The 2.4GHz and 5GHz bands are enabled.
	Blinking green	The 2.4GHz and 5GHz bands are disabled.
	Off	The 2.4GHz and 5GHz bands are disabled.
2.4GHz / 5GHz	Solid green	The 2.4GHz or 5GHz band is enabled.
	Blinking green	Data is being transmitted or received over the 2.4GHz or 5GHz band.
	Off	The 2.4GHz and 5GHz bands are disabled.

- Ports & Button



No.	Port/Button	Description
1	LAN	Connecting to a PC, a switch, or other Ethernet devices.
2	Uplink	Connecting to a router, a modem, or other Ethernet devices.
3	Reset/Pair	Reset: Hold it for about 5 seconds to reset the device to factory settings. Pair: Hold it for about 1 second to pair the device with other supported devices.
4	Power Jack	Connecting to a power adapter.
5	Power Switch	Turn on/off the device.
6	Power LED	Indicates the device's power status.
7	Cable Slot	Allows for cable management.
8	Anti-slip Pad	Prevents the device from sliding.

Application Scenario 1: CCTV Surveillance

1. Set up the Devices

Method 1: Automatic Bridge (Recommended)

Method 2: Set up the Devices Using Web UI

2. Install the Devices

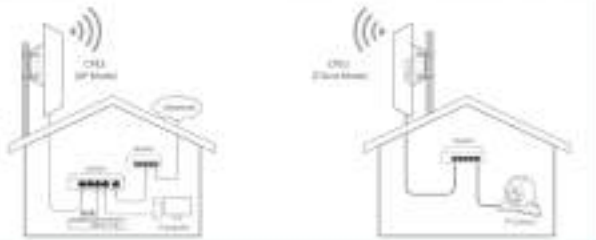

Application Scenario 2: Wireless ISP Hotspot Access

1. Set up the Device

2. Install the Devices

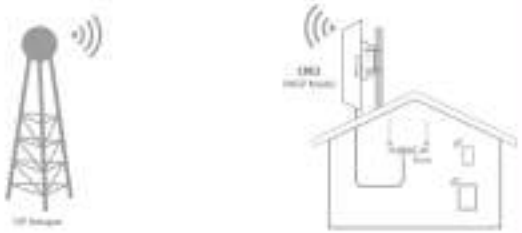

FAQ

CE

FC

RoHS