



ma_valkyriecb_01_010002_en_190102

Valkyrie CB

Conventional Wall Mounted Beacon

MADE IN PORTUGAL - EU

GLOBAL FIRE EQUIPMENT S.A.


Sítio dos Barrabés, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL

Tel: +351 289 896 560 • Sales: sales@globalfire.pt • Technical Support: techs@globalfire.pt • www.globalfire.pt


TECHNICAL SPECIFICATIONS

SUPPLY VOLTAGE	20 V to 30 V DC
CURRENT - ALARM BEACON	3 mA Max.
MAX. CABLE SIZE	2.5 mm ²
OPERATING TEMPERATURE	-10°C to 55°C
ENCLOSURE - MATERIAL	Red / ABS
MAX. HUMIDITY / PROTECTION CATEGORY	95% RH Non-Condensing / IP44
DIMENSIONS	110 (D) x 49,5 (H) mm
WEIGHT	150 g inc. beacon base - 180 g inc. packaging
ORDER CODE	DESCRIPTION
VALKYRIE CB	CONVENTIONAL WALL MOUNTED BEACON

BASE LOCK



To lock beacon remove pin available at terminal 4 on the underside of the beacon using a small screwdriver.




To unlock beacon from its base push provided unlock key through hole available on the base side wall as shown.

SOUNDER BASE - LOOP CONNECTIONS

Please note that this device is polarised.

Terminals

1. Negative Supply
2. Positive Supply - OUT
4. Positive Supply - IN

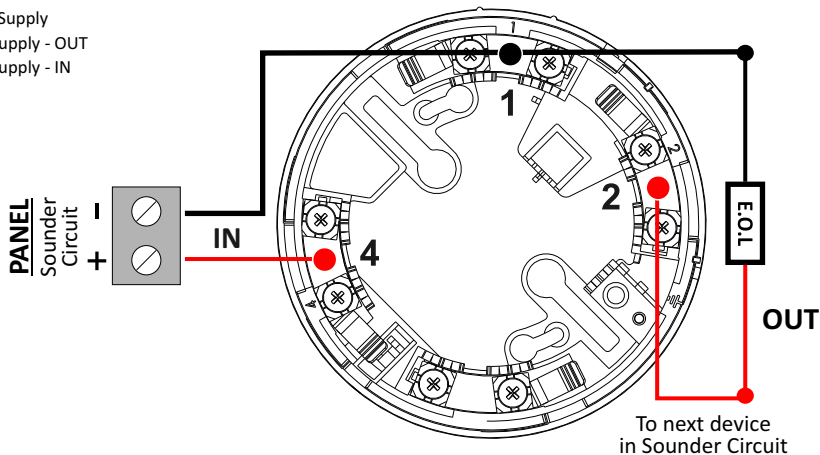

NOTE:

Only last device in Sounder Circuit should have e.o.l.(end of line) fitted across + and - terminals.