First Choice for Security Professionals

HIKVISION

DS-2CD754F-E(I)
3MP Vandal Resistant Network Dome Camera

- 3 Megapixel resolution, up to 2048x1536
- H.264/MPEG4/MJPEG Video Compression with high compression ratio
- Progressive scan CMOS
- Up to 32 GB SD/SDHC card local storage
- Two-way audio
- PoE
- Conforms to ONVIF and PSIA

Indoor

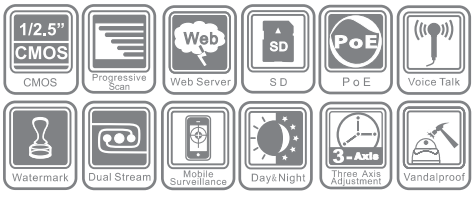

Unit: mm

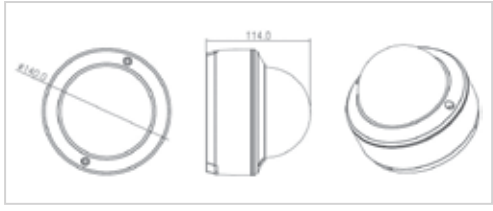

Specifications

		DS-2CD754F-E	DS-2CD754F-EI
Camera	Image Sensor	1/2.5" Progressive Scan CMOS	
	Min. Illumination	0.6 Lux @ (F1.2, AGC ON); 0.7 Lux @ (F1.6, AGC ON) DS-2CD754F-EI: 0 Lux with IR	
	Shutter Time	1/25 s to 1/100,000 s	
	Lens	2.7 - 9 mm @ F1.6	
		Angle of view: 94.7° - 28.6°	
	Lens Mount	Φ14	
	Auto Iris	DC drive	
	Angle Adjustment	Pan: 0° - 360°, Tilt: 0° - 75°, Rotation: 0° - 360°	
	Day & Night	Electronic	IR cut filter with auto switch
Compression Standard	Video Compression	H.264/MPEG4/MJPEG	
	Bit Rate	32 Kbps - 16 Mbps	
	Audio Compression	G.711	
	Dual Stream	Yes	
Image	Max. Image Resolution	2048 × 1536	
	Frame Rate	60 Hz: 15 fps (2048 × 1536), 30 fps (1920 × 1080), 30 fps (1600 × 1200)	
	Image Setting	Saturation, Brightness, Contrast adjustable through client software or web browser	
Network	Local Storage	Built-in SD/SDHC slot, up to 32 GB	
	Alarm Trigger	Motion detection, Network disconnect, IP address conflict, Storage exception	
	Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP	
	Security	Password protection, Watermark	
	System Compatibility	ONVIF, PSIA, CGI	
Interface	Audio Input	1-ch microphone input, 3.5 mm mini-jack	
	Audio Output	1-ch 3.5 mm audio interface (Line level, 600 Ω)	
	Communication Interface	1 RJ45 10 M/100 M Ethernet port and 1 RS-485 interface	
	Alarm Input	2	
	Alarm Output	2	
	Video Output	1Vp-p composite output (75 Ω/BNC)	
	Reset Button	Yes	
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F); Humidity 90% or less (non-condensing)	
	Power Supply	12 V DC ± 10%; PoE (802.3af)	
	Power Consumption	Max. 5.5 W	Max. 7.5W
	Impact Protection	IEC60068-275Eh, 50J; EN50102, up to IK10	
	IR Range	-	Up to 60 feet
	Dimension (Dia.xH)	Φ 140 × 114 mm (Φ 5.51" × 4.49")	
	Weight	1400 g (3.09 lbs)	

Accessories

DS-1227ZJ (Flush Mount), DS-1229ZJ (Wall Mount)

Accessories available separately. For complete Product and Warranty information, please visit our website **www.hikvision.com**

© 2011 Hikvision Digital Technology Co., Ltd. All Rights Reserved. All product specifications are subject to change without notice.