

# **Outdoor** ColorPro

**Outdoor ColorPro Night Vision Pan Tilt Network Camera** 

#### MODEL: VIGI C540S











People & Vehicle Analytics\* 沪

Human & Vehicle Classification





**Smart Detection** 

**Powerful Pan Tilt** 

# Face Recognition

Efficiently enhances access management and attendance control while better protecting privacy\*.



# People & Vehicle Analytics

Quickly find people or vehicles of interest using various attributes, greatly improve your search efficiency\*.



### Human & Vehicle Classification

Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.




# Smart Detection



Motion Detection



Line-Crossing Detection



Region Intrusion Detection



Camera Tampering Detection



Object Removal Detection



Object Abandoned Detection



Region Exiting Detection



Region Entering Detection


# Flexible Pan Tilt

- Customized Patrol
- Power-Off Memory Function
- Auto Tracking
- Remote Monitoring & Configuration

# VIGI Surveillance Solution


The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

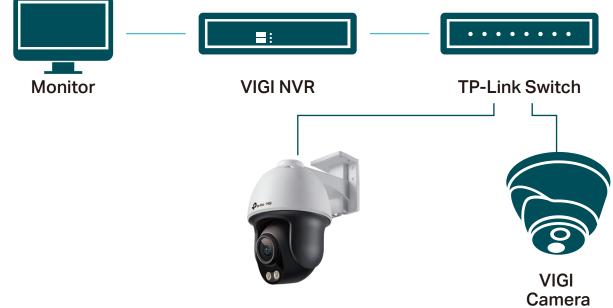

#### Flexible Installation

Find the perfect vantage point by simply securing your camera to the ceiling, wall, or pole\*\*.

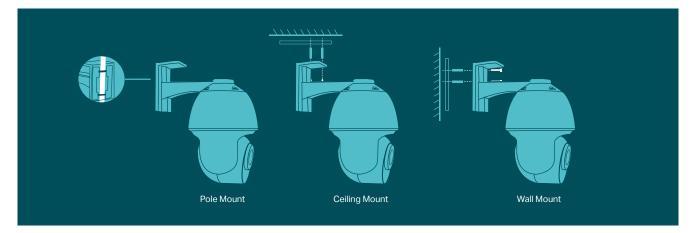

# // Specifications


| Camera   |   |
|--|---|
| Product Model  | VIGI C540S  |
| Image Sensor   | 1/1.79" Progressive Scan CMOS   |
| Min. Illumination  | 0.0005 Lux; 0 Lux with white light  |
| Shutter Speed  | 1/3 to 1/10000 s  |
| Slow Shutter   | Yes   |
| Day & Night Mechanism  | N/A   |
| Day/Night Switch   | Unified/Scheduled/Auto  |
| Lens   |   |
| Focal Length   | 4 mm  |
| Aperture   | F1.0±5%   |
| FOV  | Diagonal FOV: 127°, Horizontal FOV:104°, Vertical FOV: 55°  |
| Lens Mount   | M16*P 0.5   |
| DORI Distance  | 4 mm:<br>Detect: 63 m (207 ft)<br>Observe: 26 m (86 ft)<br>Recognize: 13m (41 ft)<br>Identify: 6 m (21 ft)  |
| Angle Adjustment (Manual)  |   |
| Range  | Pan: 0° to 348°, Tilt: 0° to 105°   |
| PTZ  |   |
|  |   |
| Pan/Tilt Range   | Pan: 0° to 348°, Tilt: 0° to 105°   |
|  | Pan: 0° to 348°, Tilt: 0° to 105°<br>Pan Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Tilt Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s  |
| Pan/Tilt Range   | Pan Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Tilt Speed:   |
| Pan/Tilt Range<br>Pan/Tilt Speed   | Pan Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Tilt Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s   |
| Pan/Tilt Range<br>Pan/Tilt Speed<br>Manual Control Speed   | Pan Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Tilt Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Configurable from 8° to 35°/s  |
| Pan/Tilt Range<br>Pan/Tilt Speed<br>Manual Control Speed<br>Presets  | Pan Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Tilt Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Configurable from 8° to 35°/s<br>300   |
| Pan/Tilt Range<br>Pan/Tilt Speed<br>Manual Control Speed<br>Presets<br>Patrol Scan   | Pan Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Tilt Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Configurable from 8° to 35°/s<br>300<br>8 patrols, up to 8 presets for each patrol   |
| Pan/Tilt Range<br>Pan/Tilt Speed<br>Manual Control Speed<br>Presets<br>Patrol Scan<br>Power-off Memory   | Pan Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Tilt Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Configurable from 8° to 35°/s<br>300<br>8 patrols, up to 8 presets for each patrol<br>Yes; Auto restore to previous PTZ and lens status after power failure                                    |
| Pan/Tilt Range<br>Pan/Tilt Speed<br>Manual Control Speed<br>Presets<br>Patrol Scan<br>Power-off Memory<br>Park Action                                  | Pan Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Tilt Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Configurable from 8° to 35°/s<br>300<br>8 patrols, up to 8 presets for each patrol<br>Yes; Auto restore to previous PTZ and lens status after power failure<br>Yes; Preset; Patrol Scan        |
| Pan/Tilt Range<br>Pan/Tilt Speed<br>Manual Control Speed<br>Presets<br>Patrol Scan<br>Power-off Memory<br>Park Action<br>3D Positioning                | Pan Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Tilt Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Configurable from 8° to 35°/s<br>300<br>8 patrols, up to 8 presets for each patrol<br>Yes; Auto restore to previous PTZ and lens status after power failure<br>Yes; Preset; Patrol Scan        |
| Pan/Tilt Range<br>Pan/Tilt Speed<br>Manual Control Speed<br>Presets<br>Patrol Scan<br>Power-off Memory<br>Park Action<br>3D Positioning<br>Illuminator | Pan Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Tilt Speed:<br>Configurable from 8° to 44°/s; Preset Speed: 44°/s<br>Configurable from 8° to 35°/s<br>300<br>8 patrols, up to 8 presets for each patrol<br>Yes; Auto restore to previous PTZ and lens status after power failure<br>Yes; Preset; Patrol Scan<br>Yes |

| Video                       |  |
|-----------------------------|--|
| Max. Resolution             | 2688x1520  |
| Main Stream                 | Frame Rate<br>50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps<br>60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps<br>Resolution:<br>2688x1520, 2560x1440, 2304x1296, 2048x1280, 1920x1080,<br>1280x720 |
| Sub-Stream                  | Frame Rate<br>50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps<br>60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps<br>Resolution:<br>704x576, 640x480, 352x288, 320x240.                                |
| Bit Rate Control            | CBR, VBR   |
| Video Compression           | Main stream: H.265/H.265+/H.264/H.264+<br>Sub-stream: H.265/H.264  |
| Video Bit Rate              | Main Stream: 256 Kbps to 6 Mbps<br>Sub-Stream: 64 Kbps to 512 Kbps   |
| Image                       |  |
| Image Settings              | Mirror, brightness, contrast, saturation, sharpness, exposure, WDR, white balance, HLC adjustable by client software   |
| Day/Night Switch            | Unified, Scheduled, Auto   |
| Image Enhancement           | BLC, HLC, 3D DNR   |
| Wide Dynamic Range (WDR)    | 120dB<br>Note: When Face Recognition s is enabled, only DWDR is supported.   |
| SNR                         | ≥ 52 dB  |
| Image Parameters Switch     | Yes  |
| Privacy Mask                | Up to 4 Masks  |
| ROI                         | 1 Region   |
| OSD Setting                 | Yes  |
| Audio                       |  |
| Audio Communication         | Two-way audio  |
| Audio Input                 | Yes  |
| Audio Output                | Yes  |
| Audio Compression           | Yes  |
| Audio Sampling Rate         | 8KHz   |
| Environment Noise Filtering | Yes  |
| Audio Bit Rate              | 64 Kbps(G.711 alaw)  |
| Network                     |  |
| Protocols                   | TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS  |

| API  | Open Network Video Interface (Profile S)  |
|--|---|
| Web Browser  | Google Chrome® 57 and above<br>Firefox® 52 and above<br>Safari® 11 and above<br>Microsoft® Edge 91 and above  |
| Security   | Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication   |
| Simultaneous Live View   | 3 Main Streams & 3 Sub-Streams  |
| Client   | VIGI App, VIGI Security Manager, VIGI NVR, Web  |
| Cloud  | Yes   |
| ONVIF  | Yes   |
| Interface  |   |
| Network Interface  | 1 RJ45 10/100M Self-Adaptive Ethernet Port, PoE   |
| On-board Storage   | Built-In Memory Card Slot, Support MicroSD Card, Up to 256 GB   |
| Built-in Speaker   | Yes   |
| Built-in Microphone  | Yes; Records Anything Going on within a 15-ft Radius of the Camera  |
| Audio  | N/A   |
| Alarm  | N/A   |
| Reset Button   | Yes   |
| Power  | DC Power Port   |
| Alarm and Event Management   |   |
|  |   |
| Smart Event  | Human & Vehicle Classification, Intrusion Detection, Line-Crossing<br>Detection, People Detection, Vehicle Detection, Region Entering<br>Detection, Region Exiting Detection, Abandoned Object Detection,<br>Object Removal Detection, Loitering Detection, Scene Change<br>Detection, Smart Frame  |
| Smart Event<br>Basic Event   | Detection, People Detection, Vehicle Detection, Region Entering<br>Detection, Region Exiting Detection, Abandoned Object Detection,<br>Object Removal Detection, Loitering Detection, Scene Change  |
|  | <ul> <li>Detection, People Detection, Vehicle Detection, Region Entering</li> <li>Detection, Region Exiting Detection, Abandoned Object Detection,</li> <li>Object Removal Detection, Loitering Detection, Scene Change</li> <li>Detection, Smart Frame</li> <li>Motion detection, Camera Tampering, Scene Change Detection,</li> </ul>   |
| Basic Event  | <ul> <li>Detection, People Detection, Vehicle Detection, Region Entering<br/>Detection, Region Exiting Detection, Abandoned Object Detection,<br/>Object Removal Detection, Loitering Detection, Scene Change<br/>Detection, Smart Frame</li> <li>Motion detection, Camera Tampering, Scene Change Detection,<br/>Exception(illegal login)</li> <li>Memory Card Video Recording, Message Push, White Light Flashing,</li> </ul>   |
| Basic Event<br>Alarm Linkage   | <ul> <li>Detection, People Detection, Vehicle Detection, Region Entering<br/>Detection, Region Exiting Detection, Abandoned Object Detection,<br/>Object Removal Detection, Loitering Detection, Scene Change<br/>Detection, Smart Frame</li> <li>Motion detection, Camera Tampering, Scene Change Detection,<br/>Exception(illegal login)</li> <li>Memory Card Video Recording, Message Push, White Light Flashing,<br/>Sound Alarm</li> </ul>   |
| Basic Event<br>Alarm Linkage<br>Linkage Method   | <ul> <li>Detection, People Detection, Vehicle Detection, Region Entering<br/>Detection, Region Exiting Detection, Abandoned Object Detection,<br/>Object Removal Detection, Loitering Detection, Scene Change<br/>Detection, Smart Frame</li> <li>Motion detection, Camera Tampering, Scene Change Detection,<br/>Exception(illegal login)</li> <li>Memory Card Video Recording, Message Push, White Light Flashing,<br/>Sound Alarm</li> <li>N/A</li> </ul>  |
| Basic Event<br>Alarm Linkage<br>Linkage Method<br>Output Notification  | <ul> <li>Detection, People Detection, Vehicle Detection, Region Entering<br/>Detection, Region Exiting Detection, Abandoned Object Detection,<br/>Object Removal Detection, Loitering Detection, Scene Change<br/>Detection, Smart Frame</li> <li>Motion detection, Camera Tampering, Scene Change Detection,<br/>Exception(illegal login)</li> <li>Memory Card Video Recording, Message Push, White Light Flashing,<br/>Sound Alarm</li> <li>N/A</li> </ul>  |
| Basic Event<br>Alarm Linkage<br>Linkage Method<br>Output Notification<br>Deep Learning Function  | <ul> <li>Detection, People Detection, Vehicle Detection, Region Entering<br/>Detection, Region Exiting Detection, Abandoned Object Detection,<br/>Object Removal Detection, Loitering Detection, Scene Change<br/>Detection, Smart Frame</li> <li>Motion detection, Camera Tampering, Scene Change Detection,<br/>Exception(illegal login)</li> <li>Memory Card Video Recording, Message Push, White Light Flashing,<br/>Sound Alarm</li> <li>N/A</li> <li>Message Push</li> <li>Supports Simultaneous Detection and Capture of Human Body and</li> </ul>                                       |
| Basic Event<br>Alarm Linkage<br>Linkage Method<br>Output Notification<br>Deep Learning Function<br>Multi-Target-Type Detection   | <ul> <li>Detection, People Detection, Vehicle Detection, Region Entering<br/>Detection, Region Exiting Detection, Abandoned Object Detection,<br/>Object Removal Detection, Loitering Detection, Scene Change<br/>Detection, Smart Frame</li> <li>Motion detection, Camera Tampering, Scene Change Detection,<br/>Exception(illegal login)</li> <li>Memory Card Video Recording, Message Push, White Light Flashing,<br/>Sound Alarm</li> <li>N/A</li> <li>Message Push</li> <li>Supports Simultaneous Detection and Capture of Human Body and<br/>Vehicle</li> </ul>                           |
| Basic Event<br>Alarm Linkage<br>Linkage Method<br>Output Notification<br>Deep Learning Function<br>Multi-Target-Type Detection<br>Face Capture                               | <ul> <li>Detection, People Detection, Vehicle Detection, Region Entering<br/>Detection, Region Exiting Detection, Abandoned Object Detection,<br/>Object Removal Detection, Loitering Detection, Scene Change<br/>Detection, Smart Frame</li> <li>Motion detection, Camera Tampering, Scene Change Detection,<br/>Exception(illegal login)</li> <li>Memory Card Video Recording, Message Push, White Light Flashing,<br/>Sound Alarm</li> <li>N/A</li> <li>Message Push</li> <li>Supports Simultaneous Detection and Capture of Human Body and<br/>Vehicle</li> <li>Yes</li> </ul>              |
| Basic Event<br>Alarm Linkage<br>Linkage Method<br>Output Notification<br>Deep Learning Function<br>Multi-Target-Type Detection<br>Face Capture<br>Face Comparison            | <ul> <li>Detection, People Detection, Vehicle Detection, Region Entering<br/>Detection, Region Exiting Detection, Abandoned Object Detection,<br/>Object Removal Detection, Loitering Detection, Scene Change<br/>Detection, Smart Frame</li> <li>Motion detection, Camera Tampering, Scene Change Detection,<br/>Exception(illegal login)</li> <li>Memory Card Video Recording, Message Push, White Light Flashing,<br/>Sound Alarm</li> <li>N/A</li> <li>Message Push</li> <li>Supports Simultaneous Detection and Capture of Human Body and<br/>Vehicle</li> <li>Yes</li> </ul>              |
| Basic Event<br>Alarm Linkage<br>Linkage Method<br>Output Notification<br>Deep Learning Function<br>Multi-Target-Type Detection<br>Face Capture<br>Face Comparison<br>General | <ul> <li>Detection, People Detection, Vehicle Detection, Region Entering<br/>Detection, Region Exiting Detection, Abandoned Object Detection,<br/>Object Removal Detection, Loitering Detection, Scene Change<br/>Detection, Smart Frame</li> <li>Motion detection, Camera Tampering, Scene Change Detection,<br/>Exception(illegal login)</li> <li>Memory Card Video Recording, Message Push, White Light Flashing,<br/>Sound Alarm</li> <li>N/A</li> <li>Message Push</li> <li>Supports Simultaneous Detection and Capture of Human Body and<br/>Vehicle</li> <li>Yes</li> <li>Yes</li> </ul> |

| Storage Humidity               | 95% or Less (Non-condensing)   |
|--------------------------------|--|
| Power Supply                   | 12V DC±5%, Max. 13.13W, 5.5mm Coaxial Power Plug<br>PoE: 802.3at, class 4, Max. 16.47 W          |
| Material                       | Plastic  |
| Protection                     | IP66   |
| Product Dimensions (L x W x H) | 120*172*203mm  |
| Package Contents               | VIGI Network Camera<br>Quick Start Guide<br>Waterproof Cable Attachments<br>Mounting Accessories |
| Net Weight                     | 0.59 Kg  |
| Gross Weight                   | 0.94 Kg  |
| Certifications                 | CE, NTRA, VCCI, KC, BSMI, FCC, IC  |

#### Dimensions

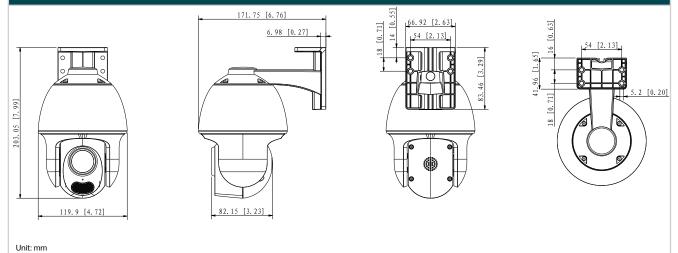

\*Some features are in development and will update with future software iterations.

\*\*Pole mounting kits and SD card are not included in the package.

Specifications are subject to change without notice and can be found at www.tp-link.com. ©2023 TP-Link