

Connect2Go: Envisalink 4



Professional IP Communicator with Full Interactive Services

The new **Envisalink 4** is a powerful TCP-IP based bus-level interface to DSC PowerSeries¹ panels and Honeywell Vista² panels. In addition to IP alarm communications with your central monitoring station, it allows your customers to view the status of and control their alarm panel through a standard web-browser or smart-phone.

DLS-2Go Enabled

The **Envisalink 4** enables downloading of any PowerSeries¹ panel over TCP/IP from anywhere in the world. This unique technology does this without the need of changes to the customer's networking equipment and even works with dynamic IP addressing.

Support for Home Automation


Through the built-in TPI (third party interface) the **Envisalink 4** is already compatible with many major home automation systems and numerous 3rd party Android and iPhone apps.

Free Connect2Go Service

Provide your customers with best-in-class Interactive Services at no monthly cost.

Module Features

- Remotely upgradable to allow for new features and services
- **Envisalink** TPI: Developer and Integration interface
- **Envisalink** Expansion Header: Add new hardware modules as they become available
- Simple to install. On-board LEDs provide all necessary status information.
- IP Alarm Communicator. Point-to-Point IP signalling to your central station. No third-party required
- DLS-2Go downloading
- Built-in basic web server and html user-interface
- 128-bit encryption
- Real-time zone status with "time-since-tripped" feature
- Local Arm/Disarm/Zone Bypass/PGM Control
- Supports all 8 partitions.
- Supports up to 128 Zones.
- Automatic Panel Time Updates (DSC¹ Only)
- 100BaseT Ethernet
- 256 Event Buffer

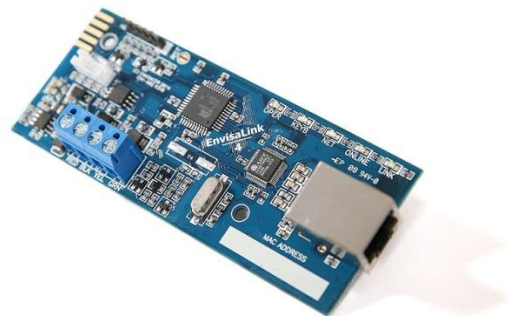

About the **Connect2Go Service**

Our free interactive service offers your customer the following:

- Remote Arm/Disarm/Zone Bypass/PGM Control
- Event Logging
- Alerting by e-mail or SMS. Up to 30 different contacts.
- Network Supervision
- Ability to label Zones, Users, and Partitions for ease of reporting
- The proprietary “Zone Map” feature provides system occupancy at a single glance
- “Smart Phone” optimized version of the portal - iPhone, Android, Blackberry compatible
- Multi-language portal support
- Available IP Camera Control
- Available IP Thermostat

Sales Information

Connect2Go products are available through all major security distributors, worldwide. Visit www.connect2go.com for distribution information in your region.

Specifications

- Panel Powered: 9-14Vdc
- Power Draw: 75 mA
- 100BaseT Ethernet
- Operating Temp: 0° to 50°C
- Humidity: 5% to 95%
- Expansion Port: 12Vdc @ 200mA maximum.
- Connectors: RJ45, 4-Terminal Screw-down
- Dimensions: 10.5 cm (4-3/16”) x 4.2 cm (1-11/16”)

Included In The Box

- **Envisalink 4** Module
- Mounting Stand-offs
- Installation Guide

Panel Compatibility

- DSC PowerSeries¹ (1555, 1555 MX, 1575, 5010 (832), 5020 (864), 1616, 1832, 1864)
- Honeywell Vista² Panels (Vista20P, 21iP, 15P, 10P, 128P, and 250P)

¹ Trademarks of Tyco Safety Products Canada

² Trademarks of Honeywell International