

Thank you for considering this precision optical equipment.

Delta Optical spółka z ograniczoną odpowiedzialnością sp.k.

Nowe Osiny, ul. Piękna 1,  
05-300 Mińsk Mazowiecki, Poland

TEL +48 25 786 0520  
FAX +48 25 759 2995  
BetterForever@deltaoptical.eu  
www.deltaoptical.eu



THE AIM IS OPTICAL PERFECTION

# DELTA-T RF MONOCULAR

Ultra compact, lightweight, laser rangefinder.  
Precise, calculation of linear range, angle,  
vertical and horizontal distance.



THE AIM IS OPTICAL PERFECTION

# DELTA-T RF MONOCULAR

Rangefinder 2000: SKU DO-2701  
Rangefinder 1200: SKU DO-2700

Measure inclination angle  
6x magnification

Calculation of EHR  
(Equivalent Horizontal Range)  
and Vertical Offset  
in 0.3 of a second





Compact  
Lightweight




Clear, intuitive  
interface

Continuous  
scan mode

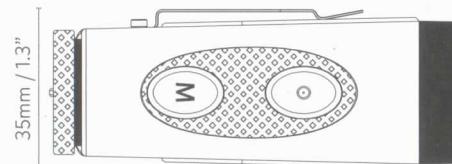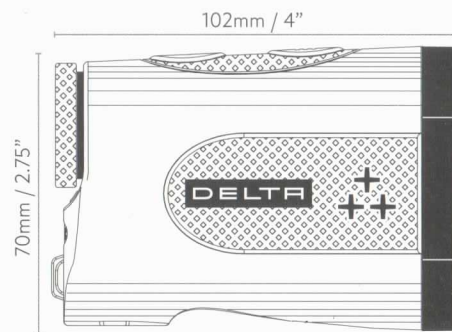

Fiberglass reinforced housing with  
metal belt clip

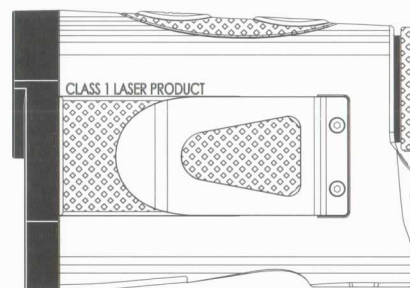

\*Measuring Range  
RF2000: 4.6-1830m / 5-2000yd  
RF1200: 4.6-1100m / 5-1200 yd

Magnification	6x
Objective	23mm / 0.9"
FOV @ 1000m	105m / 6°
Eye Relief	17mm
Diopter Adjustment	±3
Lens Coatings	HD Multilayer
Measuring Range	4.6-1830m / 5-2000yd*
Measuring Time	0.3s max
Accuracy	5-100m/yd: ± 0.5m/yd 100-200m/yd: ± 1m/yd 200-500m/yd: ± 2m/yd >500m/yd: ± 0.5%
Angle	Yes
Angle Range	-89° to +89°
Vertical Offset	Yes
Horizontal Distance	Yes
Scan Mode	Yes
Laser Type	Class 1
Laser Beam Divergence	Vertical 1.1MRAD Horizontal 0.125MRAD
Display Type	LCD
Operating Temperature	-10°C/50°C
Waterproof	IPX4
Power Supply	CR2 (3V)
Chassis	PS+GF
Weight	190g / 6.7oz (incl battery)
Dimensions	102x35x70mm



THE AIM IS OPTICAL PERFECTION